

ASTP

JSC-09144

FINAL

JOINT OPERATIONS CHECKLIST



**PREPARED BY
PROCEDURES BRANCH
CREW TRAINING & PROCEDURES DIVISION**



National Aeronautics and Space Administration
LYNDON B. JOHNSON SPACE CENTER
Houston, Texas

JUNE 2, 1975

ASTP
JOINT OPERATIONS CHECKLIST

JSC-09144
PA-N6-11170-2

PREPARED BY: Dan A. Bland, Jr.
DAN A. BLAND, JR.
CO-BOOK MANAGER

Robert R. Kain
ROBERT R. KAIN
CO-BOOK MANAGER

APPROVED BY: Raymond G. Zeidekar
RAYMOND G. ZEIDEKAR, CHIEF
INTEGRATED PROCEDURES SECTION

DRS

It is requested that any organization having comments, questions or suggestions concerning this document contact Dan A. Bland, Jr. or Robert R. Kain, CG2, Bldg. 4, ext. 4794.

This document is under the configuration control of the Crew Procedures Control Board (CPCB). All proposed changes should be submitted to the ASTP Flight Data File Manager, T. W. Holloway, CG5, Bldg. 4, Rm 225A, telephone 483-4471.

Distribution of this document is controlled by Ted A. Guillory, ext. 4271, CG54, Crew Training & Procedures Division.

ACKNOWLEDGMENTS

<u>SECTIONS</u>	<u>NAME</u>	<u>LOCATION</u>
J1-1 through J1-4	S. P. Grega, CT&PD	Rm 211,Bldg.4
J2-1 through J2-26	S. P. Grega, CT&PD	Rm 211,Bldg.4
J3-1 through J3-8	S. P. Grega, CT&PD	Rm 211,Bldg.4
J4-1 through J4-2	S. P. Grega, CT&PD	Rm 211,Bldg.4
J5-1 through J5-3	S. P. Grega, CT&PD	Rm 211,Bldg.4
J6-1 through J6-2	S. P. Grega, CT&PD	Rm 211,Bldg.4
J7-1 through J7-11	G. L. Shinkle, CT&PD	Rm 215,Bldg.4
J8-1 through J8-4	D. R. Brooks, CT&PD	Rm 220,Bldg.4
J9-1 through J9-3	R. L. Hahne, CT&PD	Rm 220,Bldg.4
J10-1 through J10-7	R. H. Nute, CT&PD	Rm 216,Bldg.4
General	B. A. Levy, TRW	Rm 256,Bldg.4

ASTP

JOINT OPERATIONS CHECKLIST

LIST OF EFFECTIVE PAGES

TRAINING 3/25/74
 REVISION 8/29/74
 REFERENCE 3/31/75
 FINAL 6/2/75

PAGE	DATE	PAGE	DATE
i	6/2/75	J/2-21	6/2/75
ii	6/2/75	J/2-22	6/2/75
iii	6/2/75	J/2-23	6/2/75
J/1-1	6/2/75	J/2-24	6/2/75
J/1-2	6/2/75	J/2-25	6/2/75
J/1-3	6/2/75	J/2-26	6/2/75
J/1-4	6/2/75	J/3-1	6/2/75
J/2-1	6/2/75	J/3-2	6/2/75
J/2-2	6/2/75	J/3-3	6/2/75
J/2-3	6/2/75	J/3-4	6/2/75
J/2-4	6/2/75	J/3-5	6/2/75
J/2-5	6/2/75	J/3-6	6/2/75
J/2-6	6/2/75	J/3-7	6/2/75
J/2-7	6/2/75	J/3-8	6/2/75
J/2-8	6/2/75	J/4-1	6/2/75
J/2-9	6/2/75	J/4-2	6/2/75
J/2-10	6/2/75	J/5-1	6/2/75
J/2-11	6/2/75	J/5-2	6/2/75
J/2-12	6/2/75	J/5-3	6/2/75
J/2-13	6/2/75		
J/2-14	6/2/75	J/6-1	6/2/75
J/2-15	6/2/75	J/6-2	6/2/75
J/2-16	6/2/75	J/7-1	6/2/75
J/2-17	6/2/75	J/7-2	6/2/75
J/2-18	6/2/75	J/7-3	6/2/75
J/2-19	6/2/75	J/7-4	6/2/75
J/2-20	6/2/75	J/7-5	6/2/75

PAGE	DATE
J/7-6	6/2/75
J/7-7	6/2/75
J/7-8	6/2/75
J/7-9	6/2/75
J/7-10	6/2/75
J/7-11	6/2/75
J/8-1	6/2/75
J/8-2	6/2/75
J/8-3	6/2/75
J/8-4	6/2/75
J/9-1	6/2/75
J/9-2	6/2/75
J/9-3	6/2/75
J/10-1	6/2/75
J/10-2	6/2/75
J/10-3	6/2/75
J/10-4	6/2/75
J/10-5	6/2/75
J/10-6	6/2/75
J/10-7	6/2/75

JOINT OPERATIONS CHECKLIST

CONTENTS

	<u>PAGE</u>
DOCKING SYSTEM CHECKOUT	J/1-1
APOLLO ACTIVE DOCKING	J/2-1
APOLLO ACTIVE UNDOCKING	2-5
APOLLO PASSIVE DOCKING	2-9
APOLLO PASSIVE UNDOCKING	2-13
APOLLO BACKUP UNDOCKING	2-17
SOYUZ RESERVE UNDOCKING (PYROTECHNIC)	2-21
APOLLO ACTIVE UNDOCKING/SEPARATION	2-23
BACKUP CHART -	
APOLLO ACTIVE DOCKING/UNDOCKING	J/3-1
BACKUP CHART -	
APOLLO PASSIVE DOCKING/UNDOCKING	3-6
CONTINGENCY DOCKING SYSTEM EXTENSION	
VERIFICATION (CAMERA)	J/4-1
APOLLO STANDARD DOCKED CONFIGURATION	J/5-1
APOLLO ACTIVE DOCKED ATTITUDE MANEUVER	J/6-1
USA/USSR PHOTO/MOVIE OPS	J/7-1
USA TV OPS	J/8-1
WASTE MANAGEMENT	J/9-1
ZONE FORMING FUNGI EXPERIMENT (AS-1)	J/10-1
MICROBIAL EXCHANGE EXPERIMENT - CSM (AS-2)	10-3
UV ABSORPTION EXPERIMENT (AS-5)	
COAS CALIBRATION	10-5
UVA SHUTDOWN	10-7
UVA STOW	10-7
COAS RETICLE	10-7

DATE 6/2/75

DOCKING SYSTEM CHECKOUT

DOCKING SYSTEM
CHECKOUT

***** CAUTION *****
 * GUIDE RING-EXTD/RETR MUST BE OPERATED *
 * BY SYSTEM A OR B ONLY (SINGLE MOTOR). *
 * DYNAMIC FORCES USING TWO MOTORS COULD *
 * CREATE STRUCTURAL LOADS BEYOND *
 * DESIGN LIMITS. *
 *
 * STRUCT LATCH-CLOSE/OPEN MUST BE OPERATED *
 * BY SYSTEM A OR B ONLY (SINGLE MOTOR). *
 * STALLED GEAR BOX LOAD USING TWO *
 * MOTORS COULD EXCEED CABLE BREAKING *
 * STRENGTH. *
 *
 * MCC MAY ADVISE THAT MOTORS IN BOTH *
 * SYSTEMS ARE DEGRADED. THEREFORE, *
 * BOTH SYSTEMS (A&B) MAY BE OPERATED *
 * SIMULTANEOUSLY. *

PNL

NOTE

3 MONITOR FC 1 OR 2(SYSTEM A) OR FC 3
 (SYSTEM B) CURRENT WHEN OPERATING
 STRUCT LATCH, GUIDE RING, OR BACKUP
 PASSIVE MOTORS.

275
5

* IF SYSTEM B MOTORS REQUIRED: *
 * CB MAIN B BAT BUS B-CLOSE(VERIFY) *
 * MAIN BUS TIE B/C-ON(UP) *
 *
 * IF SYSTEM A&B MOTORS REQUIRED: *
 * MAIN BUS TIE (2)-ON(UP) *
 *
 * TO AVOID EXCESS CURRENT DRAIN *
 * ON ENTRY BATTERIES: *
 * MAIN BUS TIE (2)-OFF(DN) *
 * AFTER SYSTEM TASK PERFORMED. *

-30:00

1.

CM4/NK(B3)/300MM(A5)
 LENS BRLT(A5), DAC MOUNT(U1)

DATE 6/2/75

DOCKING SYSTEM
CHECKOUT

J
1-2

2. 2 GUIDE RING A&B-OFF(VERIFY)
CAPTURE LATCH RELEASE A&B-OFF(VERIFY)
STURCT LATCH A&B-OFF(VERIFY)
BACKUP PASSIVE A&B-OFF(VERIFY)
- 274 CB IND LOGIC MNA&MNB-OPEN(VERIFY)
CB IND PWR AC1&AC2-OPEN(VERIFY)
CB CONTROL BAT A&B-OPEN(VERIFY)
CB MOTORS AC1(3) & AC2(3)-OPEN(VERIFY)

MCC WILL ADVISE WHEN TO ACTIVATE
THE CB'S AND EXTEND/RETRACT
GUIDE RING.


3. 274 CB IND PWR AC1-CLOSE
- 2 DOCKING LTS(6)-OUT(VERIFY)
DOCKING PB(6)-PUSH SEQUENTIALLY
DOCKING LT(6)-ON/OUT(VERIFY)
- 274 CB IND LOGIC MNA-CLOSE
CB CONTROL BAT A-CLOSE
CB MOTORS AC1(3)-CLOSE
CB DM POWER(2)-CLOSE(VERIFY)



4. ROTATE CAMERA TO PLACE SMALLEST VISIBLE
LINE ON TARGET IN THE RANGEFINDER.
FOCUS CAMERA (FROM LOW END OF LENS SCALE)
AND RECORD RANGE.

WARNING: DO NOT DISTURB CAMERA UNTIL
GUIDE RING IS EXTENDED.

5. 2
- * * * * *
- * IF STRUCT LATCH OPEN LT-OUT: *
- * STRUCT LATCH A-OPEN(~8 SEC) *
- * STRUCT LATCH OPEN LT-ON *
- * STRUCT LATCH A-OFF(CTR) *
- * * * * *




DATE 6/2/75

PNL

6.

2




* IF PASSIVE LT-OUT: *
* GUIDE RING A-RETRACT(~40 SEC) *
* PASSIVE LT-ON *
* GUIDE RING A-OFF *

IF CHECKING SYSTEM B, GO TO STEP 9:

7.

2



GUIDE RING A-EXTND (~40 SEC)
PASSIVE LT-OUT
GUIDE RING EXTEND LT-ON
GUIDE RING A-OFF(CTR)

FOCUS CAMERA (FROM LOW END OF LENS SCALE)
ON THE SAME LINE AND RECORD RANGE.

RANGE AT EXTENSION _____

RANGE AT RETRACTION _____


DISTANCE EXTENDED _____

COMPUTE GUIDE RING EXTENSION DISTANCE (RANGE
AT EXTENSION MINUS RANGE AT RETRACTION).


GUIDE RING A-RETRACT (~40 SEC)
GUIDE RING EXTD LT-OFF
PASSIVE LT-ON

GUIDE RING A-OFF (CTR)

DATE 6/2/75



PNL
8. 274 CB IND LOGIC MNA-OPEN



STRUCT LATCH OPEN LT-OUT
PASSIVE LT-OUT

274 CB IND PWR AC1-OPEN

275 CB MAIN A BAT BUS A-CLOSE(VERIFY)
CB MAIN B BAT BUS B-CLOSE(VERIFY)

VERIFY SYSTEM B STARTING AT STEP 2:

9. 274 DOCKING SYSTEM A:
CB IND LOGIC MNA-OPEN
CB IND PWR AC1-OPEN
CB CONTROL BAT A-OPEN(VERIFY)
CB MOTORS AC1(3)-OPEN(VERIFY)

DOCKING SYSTEM B:
CB IND LOGIC MNB-OPEN
CB IND PWR AC2-OPEN
CB CONTROL BAT B-OPEN(VERIFY)
CB MOTORS AC2(3)-OPEN(VERIFY)

5 MAIN BUS TIE B/C-OFF(VERIFY)

RESTOW CAMERA ASSEMBLY COMPONENTS

DATE 6/2/75

APOLLO ACTIVE APDS

APOLLO ACTIVE DOCKING

* * * * * CAUTION * * * * *

* GUIDE RING-EXTD/RETR MUST BE OPERATED *
* BY SYSTEM A OR B ONLY (SINGLE MOTOR). *
* DYNAMIC FORCES USING TWO MOTORS COULD *
* CREATE STRUCTURAL LOADS BEYOND *
* DESIGN LIMITS. *
* *
* STRUCT LATCH-CLOSE/OPEN MUST BE OPERATED *
* BY SYSTEM A OR B ONLY (SINGLE MOTOR). *
* STALLED GEAR BOX LOAD USING TWO *
* MOTORS COULD EXCEED CABLE BREAKING *
* STRENGTH. *
* *
* MCC MAY ADVISE THAT MOTORS IN BOTH *
* SYSTEMS ARE DEGRADED. THEREFORE, *
* BOTH SYSTEMS (A&B) MAY BE OPERATED *
* SIMULTANEOUSLY. *
* * * * *

REF. DOCK/UNDOCK

DATE 6/2/75

PNL

NOTE

3 MONITOR FC 1 OR 2(SYSTEM A) OR FC 3
(SYSTEM B) CURRENT WHEN OPERATING
STRUCT LATCH, GUIDE RING, OR BACKUP
PASSIVE MOTORS.

275
5

* IF SYSTEM B MOTORS REQUIRED: *
* CB MAIN B BAT BUS B-CLOSE(VERIFY) *
* MAIN BUS TIE B/C-ON(UP) *
* *
* IF SYSTEM A&B MOTORS REQUIRED: *
* MAIN BUS TIE (2)-ON(UP) *
* *
* TO AVOID EXCESS CURRENT DRAIN *
* ON ENTRY BATTERIES: *
* MAIN BUS TIE (2)-OFF(DN) *
* AFTER SYSTEM TASK PERFORMED. *

PNL


DOCKING SYSTEM PREPARATION:

DOCKING SYSTEM A:


274 CB IND LOGIC MNA-CLOSE
 CB IND PWR AC1-CLOSE
 CB CONTROL BAT A-CLOSE
 CB MOTORS AC1(3)-CLOSE
 CB DM POWER (2)-CLOSE(VERIFY)

DOCKING SYSTEM B:

274 CB IND LOGIC MNB-CLOSE
 CB IND PWR AC2-CLOSE
 CB CONTROL BAT B-CLOSE
 CB MOTORS AC2(3)-CLOSE



STRUCT LATCH OPEN LT-ON(VERIFY)
PASSIVE LT-ON(VERIFY)



GUIDE RING A-EXTD(~40 SEC)(MAY CAUSE
JET FIRINGS)
PASSIVE LT-OFF
GUIDE RING EXTD LT-ON
PASSIVE LT-OUT
GUIDE RING A-OFF(CTR)

◀INFORM SOYUZ : READY FOR DOCKING.
ARE YOU READY?

INFORM APOLLO : READY FOR DOCKING.

◀INFORM SOYUZ : APPROACHING SOYUZ.

TO INITIATE APPROACH:

- * IF NO COMM BETWEEN SPACECRAFT AND *
- * SOYUZ WISHES TO TERMINATE APOLLO *
- * APPROACH: SOYUZ WILL TURN ON BEACON *
- * LTS FOR 10 SEC, THEN OFF (TWICE) *

REF. DOCK/UNDOCK

DATE 6/2/75

J
2-3


PNL 1 VERIFY DOCKING ATTITUDE
EMS MODE-NORMAL
-05:00 THC-THRUST +X (4 JET)($\Delta V = -100.5$ FPS)
THC/RHC-MAINTAIN RELATIVE ALIGNMENT
(CLOSING $\Delta V = 0.5$ FPS)

AT CONTACT:

◀ INFORM SOYUZ : CONTACT.

INFORM APOLLO : CONTACT.

00:00 THC-THRUST +X (4 JET) AT CONTACT FOR 5 SEC MAX
GUIDE RING CAPTURE LT-ON(CAPTURE LT MAY BLINK)
OR WHEN SOYUZ REPORTS CAPTURE



* IF SCS CONTROL REQD: *

* MAN ATT(3)-MIN IMP *

* (<2 SEC AFTER CAPTURE) *

* AUTO RCS SELECT : A3,C4,B3,D4-OFF *

* : B/D ROLL(4)-OFF *

* DBD/RATE-MIN/HI *

* BMAG MODE(3)-ATT 1/RATE 2 *

* MAN ATT(3)-RATE CMD *

* SC CONT-SCS *

1 SC CONT-CMC/FREE (<2 SEC AFTER CAPTURE)
8 AUTO RCS SELECT : A3,C4,B3,D4-OFF
1 SC CONT-CMC/AUTO

◀ INFORM SOYUZ : CAPTURE.

INFORM APOLLO : CAPTURE.

WAIT FOR SPACECRAFT TO STABILIZE(~2 MIN)


◀ INFORM SOYUZ : INITIATING RETRACTION.

DATE 6/2/75

J
2-4

PNL

2



TO RETRACT:

GUIDE RING A-RETRACT(~40 SEC)

GUIDE RING EXTD LT-OUT


STRUCT RING CONTACT LT-ON

(WAIT 2 SEC)

GUIDE RING A-OFF(CTR)

TO PRELOAD STRUCTURAL LATCHES:

2



STRUCT LATCH A-CLOSE(~8 SEC)

STRUCT LATCH OPEN LT-OUT

STRUCT LATCH CLOSE LT-ON(LT MAY FLICKER)

STRUCT LATCH A-OFF(CTR)

◀INFORM SOYUZ : DOCKING COMPLETED.

INFORM APOLLO : INTERFACE SEAL COMPRESSED.
SOYUZ SYSTEM CHECK

PERFORM STANDARD APOLLO DOCKED CONFIGURATION
CHECKLIST(J/5-1)

DATE 6/2/75

J

2-5

APOLLO ACTIVE UNDOCKING

PNL

HATCH 3-CLOSED (VERIFY)
HATCH 3 PEV-CLOSED (VERIFY)

V48E(61102,11111)(DO NOT ACTIVATE DAP)

1 EMS FUNC/MODE-ΔVSET/STBY
SET ΔVC=+100.0 FPS
EMS FUNC-ΔV

◀INFORM SOYUZ : PREPARING FOR UNDOCKING.

DOCKING SYSTEM PREPARATION:

DOCKING SYSTEM A:

274 CB IND LOGIC MNA-CLOSE
CB IND PWR AC1-CLOSE
CB CONTROL BAT A-CLOSE
CB MOTORS AC1(3)-CLOSE


DOCKING SYSTEM B:

CB IND LOGIC MNB-CLOSE
CB IND PWR AC2-CLOSE
CB CONTROL BAT B-CLOSE
CB MOTORS AC2(3)-CLOSE

DOCKING STATUS LIGHTS:

GUIDE RING CAPTURE LT-ON(VERIFY)
STRUCT RING CONTACT LT-ON(VERIFY)
STRUCT LATCH CLOSE LT-ON(VERIFY)

DATE 6/2/75



* IF SOYUZ CLOSED ACTIVE HOOKS: *

*


◀INFORM SOYUZ : OPEN YOUR ACTIVE HOOKS. *

*

* INFORM APOLLO : ACTIVE HOOKS OPEN. *

J
2-6

PNL
-05:00 ◀ INFORM SOYUZ : OPENING ACTIVE HOOKS.



STRUCT LATCH A-OPEN(~8 SEC)
STRUCT LATCH CLOSE LT-OUT
STRUCT LATCH OPEN LT-ON

* IF STRUCT LATCH OPEN LT-OUT: *
* USE BU PROCEDURE FOR APOLLO ACTIVE *
* UNDOCKING JOINT OPS CKLT Pg J/3-4 *

STRUCT LATCH A-OFF(CTR)


-02:00 ◀ INFORM SOYUZ : READY FOR UNDOCKING.

INFORM APOLLO : READY FOR UNDOCKING.

TO INITIATE ACTIVE UNDOCKING:
1 EMS MODE-NORMAL

◀ INFORM SOYUZ : INITIATING UNDOCKING
5,4,3,2,1 MARK

00:00



CAPTURE LATCH A&B-RELEASE(MOM)
GUIDE RING CAPTURE LT-OUT
PASSIVE LT-ON
STRUCT RING CONTACT LT-OUT

MONITOR UNDOCKING $\Delta V_C = +100.2$ FPS

8 AUTO RCS SELECT(16)-MNA/MNB
1 BMAG MODE(3)-ATT1/RATE2
MAN ATT(3)-RATE CMD
SC CONT-SCS
EMS FUNC/MODE-OFF/STBY
V46E(ACTIVATE APOLLO DAP)

DATE 6/2/75

J
2-7

PNL

◀ INFORM SOYUZ : UNDOCKING COMPLETED.

INFORM APOLLO : UNDOCKING COMPLETED.

274 DOCKING SYSTEM A:
 CB IND LOGIC MNA-OPEN
 CB IND PWR AC1-OPEN
 CB CONTROL BAT A-OPEN
 CB MOTORS AC1(3)-OPEN

DOCKING SYSTEM B:
 CB IND LOGIC MNB-OPEN
 CB IND PWR AC2-OPEN
 CB CONTROL BAT B-OPEN
 CB MOTORS AC2(3)-OPEN

5 MAIN BUS TIE (2)-OFF(DN)

DATE 6/2/75

J
2-8

THIS PAGE INTENTIONALLY BLANK

DATE 6/2/75

J
2-9

APOLLO PASSIVE APDS

APOLLO PASSIVE DOCKING

PNL
1

EMS FUNC/MODE- Δ V SET/STBY
SET Δ VC=-100.0 FPS
EMS FUNC- Δ V

MANEUVER TO STATION KEEP ON SOYUZ +X AXIS

◀ INFORM SOYUZ : INITIATING ORIENTATION OF APOLLO.

DOCKING SYSTEM PREPARATION:

DOCKING SYSTEM A:

274 CB IND LOGIC MNA-CLOSE
CB IND PWR AC1-CLOSE
CB CONTROL BAT A-CLOSE
CB MOTORS AC1(3)-CLOSE

DOCKING SYSTEM B:


CB IND LOGIC MNB-CLOSE
CB IND PWR AC2-CLOSE
CB CONTROL BAT B-CLOSE
CB MOTORS AC2(3)-CLOSE

2 GUIDE RING A-RETRACT(MAY CAUSE
JET FIRINGS)(VERIFY PASSIVE LT-ON)
GUIDE RING A-OFF(CTR)
STRUCT LATCH A-OPEN(~8 SEC)(VERIFY OPEN)
STRUCT LATCH A-OFF(CTR)

DOCKING STATUS LIGHTS:

STRUCT LATCH OPEN LT-ON(VERIFY)
PASSIVE LT-ON(VERIFY)

DATE 6/2/75



J
2-10

PNL

◀ INFORM SOYUZ : ORIENTATION ESTABLISHED.
READY FOR DOCKING.
ARE YOU READY?

INFORM APOLLO : READY FOR DOCKING.

◀ INFORM SOYUZ : APPROACHING SOYUZ.

TO INITIATE APPROACH:

- * IF NO COMM BETWEEN SPACECRAFT AND *
- * SOYUZ WISHES TO TERMINATE APOLLO *
- * APPROACH: SOYUZ WILL TURN ON BEACON *
- * LTS FOR 10 SEC, THEN OFF (TWICE) *

VERIFY DOCKING ATTITUDE

1
-05:00

EMS MODE-NORMAL

THC-THRUST +X (4 JET)($\Delta V = -100.5 \text{ FPS}$)


THC/RHC-MAINTAIN RELATIVE ALIGNMENT
(CLOSING $\Delta V = 0.5 \text{ FPS}$)

AT CONTACT:

INFORM APOLLO : CONTACT.

◀ INFORM SOYUZ : CONTACT.

00:00



THC-THRUST +X (4 JET) AT CONTACT FOR 5 SEC MAX.
GUIDE RING CAPTURE LT-ON(CAPTURE LT MAY BLINK)
OR WHEN SOYUZ REPORTS CAPTURE

- * IF SCS CONTROL REQD: *
- * MAN ATT(3)-MIN IMP *
- * (<2 SEC AFTER CAPTURE) *
- * AUTO RCS SELECT : A3,C4,B3,D4-OFF *
- * : B/D ROLL(4)-OFF *
- * DBD/RATE-MIN/HI *
- * BMAG MODE(3)-ATT 1/RATE 2 *
- * MAN ATT(3)-RATE CMD *
- * SC CONT-SCS *

DATE 6/2/75

J
2-11


PNL
1 SC CONT-CMC/FREE (<2 SEC AFTER CAPTURE)
8 AUTO RCS SELECT : A3,C4,B3,D4-OFF
1 SC CONT-CMC/AUTO

INFORM APOLLO : CAPTURE.

◀INFORM SOYUZ : CAPTURE.

INFORM APOLLO : INITIATING RETRACTION.

MONITOR RETRACTION (~6 MIN):
STRUCT RING CONTACT LT-ON



INFORM APOLLO : INTERFACE SEAL COMPRESSED.
DOCKING SYSTEM POWER OFF.

SOYUZ SYSTEM CHECK

◀INFORM SOYUZ : DOCKING COMPLETED.

PERFORM STANDARD APOLLO DOCKED CONFIGURATION
CHECKLIST(J/5-1)

DATE 6/2/75

J
2-12

THIS PAGE INTENTIONALLY BLANK

DATE 6/2/75

APOLLO PASSIVE UNDOCKING

PNL

HATCH 3-CLOSED (VERIFY)
HATCH 3 PEV-CLOSED (VERIFY)

V48E(61102,11111)(DO NOT ACTIVATE)

1 EMS FUNC/MODE-ΔV SET/STBY
SET ΔVC=+100.0 FPS
EMS FUNC-ΔV

INFORM APOLLO : PREPARING FOR UNDOCKING.

DOCKING SYSTEM PREPARATION:

DOCKING SYSTEM A:

274 CB IND LOGIC MNA-CLOSE
CB IND PWR AC1-CLOSE
CB CONTROL BAT A-CLOSE
CB MOTORS AC1(3)-CLOSE

DOCKING SYSTEM B:

CB IND LOGIC MNB-CLOSE
CB IND PWR AC2-CLOSE
CB CONTROL BAT B-CLOSE
CB MOTORS AC2(3)-CLOSE

* IF ACTIVE HOOKS CLOSED:

*

INFORM SOYUZ : OPENING ACTIVE HOOKS.

*

*  STRUCT LATCH A-OPEN(~8 SEC)


*  STRUCT LATCH CLOSE LT-OUT

*  STRUCT LATCH OPEN LT-ON

DATE 6/2/75

J
2-14

PNL



DOCKING STATUS LIGHTS:

STRUCT LATCH OPEN LT-ON(VERIFY)
GUIDE RING CAPTURE LT-ON(VERIFY)
PASSIVE LT-ON(VERIFY)
STRUCT RING CONTACT LT-ON(VERIFY)


INFORM APOLLO : READY FOR UNDOCKING.

◀ INFORM SOYUZ : READY FOR UNDOCKING.

INFORM APOLLO : INITIATING UNDOCKING.

EMS MODE-NORMAL
MONITOR PASSIVE UNDOCKING

AT UNDOCKING:



GUIDE RING CAPTURE LT-OUT
STRUCT RING CONTACT LT-OUT

MONITOR UNDOCKING $\Delta VC = +100.2$ FPS

8 AUTO RCS SELECT(16)-MNA/MNB
1 BMAG MODE(3)-ATT1/RATE2
MAN ATT(3)-RATE CMD
SC CONT-SCS
EMS FUNC/MODE-OFF/STBY
V46E (ACTIVATE APOLLO DAP)

DATE 6/2/75

J
2-15

PNL

INFORM APOLLO : UNDOCKING COMPLETED.

INFORM SOYUZ : UNDOCKING COMPLETED.

274 DOCKING SYSTEM A:
 CB IND LOGIC MNA-OPEN
 CB IND PWR AC1-OPEN
 CB CONTROL BAT A-OPEN
 CB MOTORS AC1(3)-OPEN

DOCKING SYSTEM B:
 CB IND LOGIC MNB-OPEN
 CB IND PWR AC2-OPEN
 CB CONTROL BAT B-OPEN
 CB MOTORS AC2(3)-OPEN

5 MAIN BUS TIE(2)-OFF(VERIFY)

DATE 6/2/75

J
2-16

THIS PAGE INTENTIONALLY BLANK

DATE 6/2/75

J
2-17

BACKUP UNDOCKING

APOLLO BACKUP UNDOCKING

PNL

HATCH 3-CLOSED (VERIFY)
HATCH 3 PEV-CLOSED (VERIFY)

INFORM APOLLO : APOLLO BACKUP UNDOCKING
REQUIRED.

V48E(61102,11111)(DO NOT ACTIVATE DAP)

- 1 EMS FUNC/MODE-ΔV SET/STBY
SET ΔVC=+100.0 FPS
EMS FUNC-ΔV

DOCKING SYSTEM PREPARATION

DOCKING SYSTEM A:

- 274 CB IND LOGIC MNA-CLOSE
CB IND PWR AC1-CLOSE
CB CONTROL BAT A-CLOSE
CB MOTORS AC1(3)-CLOSE


DOCKING SYSTEM B:

- CB IND LOGIC MNB-CLOSE
CB IND PWR AC2-CLOSE
CB CONTROL BAT B-CLOSE
CB MOTORS AC2(3)-CLOSE

PASSIVE DOCKING STATUS LIGHTS:

- STRUCT LATCH OPEN LT-ON(VERIFY)
GUIDE RING CAPTURE LT-ON(VERIFY)
PASSIVE LT-ON(VERIFY)
STRUCT RING CONTACT LT-ON(VERIFY)

DATE 6/2/75



J
2-18

PNL

CONFIGURE BATTERY POWER:


275 ~~CB MAIN A BAT BUS A-CLOSE(VERIFY)~~
 ~~CB MAIN B BAT BUS B-CLOSE(VERIFY)~~

5 MAIN BUS TIE(2)-ON(UP)

TO INITIATE UNDOCKING:

EMS MODE-NORMAL

◀INFORM SOYUZ : INITIATING BACKUP UNDOCKING
 5,4,3,2,1 MARK.



BACKUP PASSIVE A&B-RELEASE(~8 SEC)
GUIDE RING CAPTURE LT-OUT
PASSIVE LT-OUT
STRUCT RING CONTACT LT-OUT

MONITOR UNDOCKING $\Delta V C = +100.2$ FPS

8 AUTO RCS SELECT(16)-MNA/MNB
1 BMAG MODE(3)-ATT1/RATE 2
 MAN ATT (3)-RATE CMD
 SC CONT-SCS
 EMS FUNC/MODE-OFF/STBY
 V46E(ACTIVATE APOLLO DAP)


◀INFORM SOYUZ : UNDOCKING COMPLETED.

INFORM APOLLO : UNDOCKING COMPLETED.

DATE 6/2/75

PNL

2



TO RESET PASSIVE HOOKS:
BACKUP PASSIVE A&B-RESET(~8 SEC)
PASSIVE LT-ON(LT MAY FLICKER)
STRUCT LATCH A-OPEN(~8 SEC)
STRUCT LATCH CLOSE LT-OUT
STRUCT LATCH OPEN LT-ON

274

DOCKING SYSTEM A:
CB IND LOGIC MNA-OPEN
CB IND PWR AC1-OPEN
CB CONTROL BAT A-OPEN
CB MOTORS AC1(3)-OPEN

DOCKING SYSTEM B:
CB IND LOGIC MNB-OPEN
CB IND PWR AC2-OPEN
CB CONTROL BAT B-OPEN
CB MOTORS AC2(3)-OPEN

5 MAIN BUS TIE(2)-OFF(VERIFY)

IF REQUIRED, CONTINUE NOMINAL APOLLO
UNDOCKING PROCEDURES CONCERNING
SOLAR ECLIPSE OR UVA.

DATE 6/2/75

J
2-20

THIS PAGE INTENTIONALLY BLANK

DATE 6/2/75

J
2-21

SOYUZ RESERVE UNDOCKING (PYROTECHNIC)

PNL

HATCH 3-CLOSED (VERIFY)
HATCH 3 PEV-CLOSED (VERIFY)
HATCH 1-CLOSED

◀INFORM SOYUZ : BACKUP UNDOCKING FAILURE.
MCC ADVICE REQUIRED. STANDBY.

V48E(61102,11111)(DO NOT ACTIVATE DAP)

SET $\Delta VC = +100.0$ FPS
EMS FUNC- ΔV

WITH MCC CONCURRENCE.

INFORM APOLLO : READY FOR RESERVE UNDOCKING.

◀INFORM SOYUZ : READY FOR RESERVE UNDOCKING.

INFORM APOLLO : INITIATING RESERVE UNDOCKING
5,4,3,2,1 MARK.

MONITOR UNDOCKING $\Delta VC = +100.2$ FPS

8
1
AUTO RCS SELECT(16)-MNA/MNB
BMAG MODE(3)-ATT1/RATE 2
MAN ATT (3)-RATE CMD
SC CONT-SCS
EMS FUNC/MODE-OFF/STBY
V46 (ACTIVATE APOLLO DAP)

DATE 6/2/75

J
2-22

PNL

◀ INFORM SOYUZ : UNDOCKING COMPLETED.

INFORM APOLLO : UNDOCKING COMPLETED.

274 DOCKING SYSTEM A:
 CB IND LOGIC MNA-OPEN
 CB IND PWR AC1-OPEN
 CB CONTROL BAT A-OPEN
 CB MOTORS AC1(3)-OPEN

DOCKING SYSTEM B:
 CB IND LOGIC MNB-OPEN
 CB IND PWR AC2-OPEN
 CB CONTROL BAT B-OPEN
 CB MOTORS AC2 (3)-OPEN

5 MAIN BUS TIE(2)-OFF(DN)

IF REQUIRED, CONTINUE NOMINAL APOLLO
UNDOCKING PROCEDURES CONCERNING
SOLAR ECLIPSE OR UVA.

DATE 6/2/75

ACTIVE UNDOCKING/SEPARATION CHECKLIST

EMS FUNC/MODE - ΔV SET/STBY
SET ΔV = +100.0 FPS
EMS FUNC - ΔV
RHC PWR NORMAL #2 - AC/DC
RHC PWR DIRECT #2 - MNA/B
DBD/RATE - MIN/LOW
MAN ATT (P&Y) - RATE CMD (VER)
MAN ATT (ROLL) - MIN IMP (VER)
THC PWR - ON (UP)
COAS PWR - ON (UP)
RHC #2 - ARMED
THC - ARMED
EXT LTS RUN/EVA - OFF (VER)

***** CAUTION *****
GUIDE RING-EXTD/RETR MUST BE OPERATED
BY SYSTEM A OR B ONLY (SINGLE MOTOR).
DYNAMIC FORCES USING 2 MOTORS COULD
CREATE STRUCTURAL LOADS BEYOND
DESIGN LIMITS.

STRUCT LATCH-OPEN MUST BE OPERATED
BY SYSTEM A OR B ONLY (SINGLE MOTOR).
STALLED GEAR BOX LOAD USING 2 MOTORS
COULD EXCEED CABLE BREAKING STRENGTH.

MCC MAY ADVISE THAT MOTORS IN BOTH
SYSTEMS ARE DEGRADED. THEREFORE,
BOTH SYSTEMS (A&B) MAY BE OPERATED
SIMULTANEOUSLY.

- 3 NOTE: MONITOR FC 1 OR 2 (SYSTEM A)
OR FC 3 (SYSTEM B) CURRENT WHEN
OPERATING STRUCT LATCH, GUIDE
RING, OR BACKUP PASSIVE MOTORS.

DATE 6/2/75

J
2-24

```
*IF_SYSTEM_B_MOTORS_REQUIRED: *
*
275 *CB MAIN B BAT BUS B-CLOSE(VER)*
5  *MAIN BUS TIE B/C - ON (UP) *
*
*IF_SYSTEM_A&B_MOTORS_REQUIRED: *
*
*MAIN BUS TIE (2) - ON (UP) *
*
*TO_AVOID_EXCESS_CURRENT_DRAIN *
*
*ON_ENTRY_BATTERIES: *
*
*MAIN BUS TIE (2) - OFF (DN) *
* AFTER SYSTEM TASK PERFORMED *
```

←DP INFORM SOYUZ:
PREPARING FOR UNDOCKING.

DOCKING_SYSTEM_PREPARATION:

DOCKING_SYSTEM_A:

```
274 CB IND LOGIC MNA - CLOSE
      CB IND PWR AC1 - CLOSE
      CB CONTROL BAT A - CLOSE
      CB MOTORS AC1 (3) - CLOSE
```

DOCKING_SYSTEM_B:

```
274 CB IND LOGIC MNB - CLOSE
      CB IND PWR AC2 - CLOSE
      CB CONTROL BAT B - CLOSE
      CB MOTORS AC2 (3) - CLOSE
```

```
3 DSE: (HBR/RCD/FWD/CMD RESET)
230 UP TLM - RELAY
```

DATE 6/2/75

J
2-25

DOCKING STATUS LIGHTS:
OUT-OUT GUIDE RING CAPTURE LT - ON (VERIFY)
OUT LIT STRUCT RING CONTACT LT - ON (VERIFY)
LIT-LIT STRUCT LATCH CLOSE LT - ON (VERIFY)
* IF SOYUZ CLOSED ACTIVE HOOKS:
*
* ←DP INFORM SOYUZ: OPEN YOUR ACTIVE HOOKS.*
*
* IINFORM APOLLO: ACTIVE HOOKS OPEN.I *

55:00 ←DP INFORM SOYUZ: OPENING ACTIVE HOOKS.

2 STRUCT LATCH A - OPEN (~8 SEC)
STRUCT LATCH CLOSE LT - OUT
LIT-OUT STRUCT LATCH OPEN LT - ON
OUT LIT * IF STRUCT LATCH OPEN LT - OUT: *
LIT-OUT * USE BU PROCEDURE FOR APOLLO ACTIVE *
* UNDOCKING JOINT OPS CKLT PG J/3-4 *
STRUCT LATCH A - OFF (CTR)

56:00 AUTO RCS SEL (16) - MNA/B

58:00 ←DP INFORM SOYUZ: READY FOR UNDOCKING.

IINFORM APOLLO: READY FOR UNDOCKING.I

P48
59:00 VTR HEAD WHEEL DRIVE MOTOR - ON
VTR TAPE MODE - RECORD
DAC - ON

59:30 EMS MODE - NORMAL
V46E

59:55 ←DP INFORM SOYUZ: INITIATING UNDOCKING
5,4,3,2,1 MARK.

DATE 6/2/75

J
2-26

00:00 CAPTURE LATCH A&B - RELEASE (MOM)
GUIDE RING CAPTURE LT - OUT
LIT LIT PASSIVE LT - ON
OUT OUT STRUCT RING CONTACT LT - OUT
OUT OUT

MONITOR UNDOCKING ΔVC = +100.2 FPS

← DP INFORM SOYUZ: UNDOCKING COMPLETED.

~~I INFORM APOLLO: UNDOCKING COMPLETED. I~~

00:15 THC - THRUST (-X) (4 JET) FOR 3 SEC
00:30 THC - THRUST (-X) (4 JET) FOR 4 SEC (1 MPS)

P00
EMS - OFF/STBY
THC PWR - OFF
RHC #2 - LOCKED

07:00 DAC - OFF

DATE 6/2/75

DATE 6/2/75

BACKUP PROCEDURES FOR APOLLO ACTIVE DOCKING

PHASE	SYMPTOM	PROBLEM	APOLLO PROCEDURE	INFORM SOYUZ:	
DOCKING PREPARATION	STRUCT LATCH OPEN LT NOT ON  SHOULD BE  OR  (ACTIVE HOOKS MAY BE CLOSED)	SENSE CIRCUIT FAILURE OR ACTIVE HOOKS ARE NOT OPEN (NORMALLY OPEN AT LAUNCH)	1. MAIN BUS TIE B/C-ON (UP) MONITOR FC 3 CURRENT (PNL 3) STRUCT LATCH B-OPEN (~8 SEC) MONITOR STATUS LT STRUCT LATCH B-OFF (CTR) 2. MAIN BUS TIE (2)-ON (UP) MONITOR FC 1 AND 3 CURRENT (PNL 3) STRUCT LATCH A&B-OPEN (~4 SEC) MONITOR STATUS LT STRUCT LATCH A&B-OFF (CTR) 3. CONTINUE ACTIVE DOCKING	----- ----- -----	
	PASSIVE LT NOT ON  SHOULD BE 	SENSE CIRCUIT FAILURE OR GUIDE RING NOT FULLY RETRACTED OR PASSIVE HOOKS NOT CLOSED OR BODY LATCHES NOT LOCKED	1. MONITOR FC 1 CURRENT (PNL 3) GUIDE RING A-RETRACT (~40 SEC) MONITOR STATUS LT GUIDE RING A-OFF (CTR) 2. MAIN BUS TIE B/C-ON (UP) SEE CSM MALF PROC SYMPTOM 1 (Pg 14-3)	----- 2. WE ARE HAVING DIFFICULTY WITH DOCKING PREPARATION. STANDBY.	2. У НАС ТРУДНОСТИ ПРИ ПОДГОТОВКЕ К СТЫКОВКЕ. БУДЬТЕ НА ПРИЕМЕ.
	GUIDE RING EXTD LT NOT ON  SHOULD BE  OR  (GUIDE RING MAY BE PARTIALLY EXTENDED)	SENSE CIRCUIT FAILURE OR GUIDE RING DID NOT EXTEND	1. MAIN BUS TIE B/C-ON (UP) MONITOR FC 3 CURRENT (PNL 3) GUIDE RING B-EXTD (~40 SEC) (MAY CAUSE JET FIRING) MONITOR STATUS LT GUIDE RING B-OFF (CTR) 2. SEE CSM MALF PROC SYMPTOM 2 (Pg 14-5)	----- 2. WE ARE HAVING DIFFICULTY WITH DOCKING PREPARATION. STANDBY.	2. У НАС ТРУДНОСТИ ПРИ ПОДГОТОВКЕ К СТЫКОВКЕ. БУДЬТЕ НА ПРИЕМЕ.

3-1

BACKUP DOCK/UNDOCK

BACKUP DOCK/UNDOCK

BACKUP PROCEDURES FOR APOLLO ACTIVE DOCKING (cont.)

PHASE	SYMPTOM	PROBLEM	APOLLO PROCEDURE	INFORM SOYUZ:	
CAPTURE	GUIDE RING CAPTURE LT NOT ON  SHOULD BE  (CAPTURE LT MAY BLINK)	SENSE CIRCUIT FAILURE OR CAPTURE LATCHES DID NOT ENGAGE	1. THRUST ASAP (THC -X ~1.0 SEC) IF CAPTURED, CONTINUE ACTIVE DOCKING	-----	
			2. IF NO CAPTURE, STATION KEEP AND ADVISE MCC. IF SOYUZ ORIENTATION SYSTEM WAS DISABLED AT CONTACT, DOCKING MUST BE DELAYED 1 REV. REATTEMPT DOCKING WITH MCC AND SOYUZ CONCURRENCE	2. MCC ADVICE REQUIRED. STANDBY. APOLLO READY TO REPEAT DOCKING. ARE YOU READY?	2. ТРЕБУЕТСЯ РЕКОМЕНДАЦИЯ ЦУПа. БУДЬТЕ НА ПРИЕМЕ. "АПОЛЛОН" ГОТОВ ПОВТОРИТЬ СТЫКОВКУ. ВЫ ГОТОВЫ?
			3. IF NO CAPTURE, THRUST ASAP (THC -X ~1.0 SEC) CAPTURE LATCH A&B RELEASE (MOM) ADVISE MCC	3. MCC ADVICE REQUIRED. STANDBY.	3. ТРЕБУЕТСЯ РЕКОМЕНДАЦИЯ ЦУПа. БУДЬТЕ НА ПРИЕМЕ.
INTERFACE CONTACT	GUIDE RING EXT'D LT NOT OUT  SHOULD BE  OR STRUCT RING CONTACT LT NOT ON  (GUIDE RING MAY BE PARTIALLY RETRACTED)	SENSE CIRCUIT OR GUIDE RING DID NOT RETRACT	1. VERIFY SOYUZ INTERFACE MATE LT	1. NO RETRACTION. IS YOUR INTERFACE MATE LT LIT?	1. НЕТ СТЫГИВАНИЯ. ВАШ ТРАНСПАРАНТ "СТЫК СОВМЕЩЕН" ГОРИТ?
			2. MAIN BUS TIE B/C-ON (UP) MONITOR FC 3 CURRENT (PNL 3) GUIDE RING B-RETRACT (~40 SEC) MONITOR STATUS LT GUIDE RING B-OFF (CTR)	2. PERFORMING BACKUP PROCEDURES. STANDBY.	2. ВЫПОЛНЯЕМ РЕЗЕРВНЫЕ ОПЕРАЦИИ. БУДЬТЕ НА ПРИЕМЕ.
			3. SEE CSM MALF PROC SYMPTOM 3 (Pg 14-6)	-----	

3-2
J

DATE 6/2/75

DATE 6/2/75

BACKUP PROCEDURES FOR APOLLO ACTIVE DOCKING (cont.)

PHASE	SYMPTOM	PROBLEM	APOLLO PROCEDURE	INFORM SOYUZ:	
INTERFACE CONTACT (cont.)	STRUCT LATCH CLOSE LT NOT ON  SHOULD BE  OR 	SENSE CIRCUIT FAILURE OR ACTIVE HOOKS DID NOT CLOSE	1. MAIN BUS TIE B/C-ON (UP) MONITOR FC 3 CURRENT (PML 3) STRUCT LATCH B-OPEN (~8 SEC) STRUCT LATCH B-CLOSE (~8 SEC) MONITOR STATUS LT	-----	
			2. VERIFY SOYUZ INTERFACE SEAL COMPRESS LT LIT. 2a. IF POSITIVE, SEE CSM MALF PROC SYMPTOM 4 BOX 4 (Pg 14-8) 2b. IF NEGATIVE, SEE CSM MALF PROC SYMPTOM 4a (Pg 14-8)	2. OUR ACTIVE HOOKS WILL NOT CLOSE. IS YOUR INTERFACE SEAL COMPRESS LT LIT?	2. НАШИ АКТИВНЫЕ КРЮКИ НЕ ЗАКРЫВАЮТСЯ. ВАШ ТРАНСПАРАНТ "СТЫК ОБЖАТЬ" ГОРИТ?

BACKUP PROCEDURES FOR APOLLO ACTIVE UNDOCKING

PHASE	SYMPTOM	PROBLEM	APOLLO PROCEDURE	INFORM SOYUZ:	
UNDOCKING PREPARATION	STRUCT LATCH OPEN LT NOT ON  SHOULD BE  OR 	SENSE CIRCUIT FAILURE OR ACTIVE HOOKS DID NOT OPEN	1. MAIN BUS TIE B/C-ON (UP) MONITOR FC 3 CURRENT (PNL 3) STRUCT LATCH B-OPEN (~8 SEC) MONITOR STATUS LT STRUCT LATCH B-OFF (CTR)	1. OUR ACTIVE HOOKS WILL NOT OPEN. STANDBY.	1. НАШИ АКТИВНЫЕ КРЮКИ НЕ ОТКРЫВАЮТСЯ. БУДЬТЕ НА ПРИЕМЕ.
			2. MAIN BUS TIE (2) - ON (UP) MONITOR FC 1 AND 3 CURRENT (PNL 3) STRUCT LATCH A&B-OPEN (~4 SEC) MONITOR STATUS LT STRUCT LATCH A&B-OFF (CTR)	-----	
			3. MONITOR FC 1 AND 3 CURRENT (PNL 3) BACKUP PASSIVE A&B-RELEASE (~8 SEC) (WILL NOT CHANGE LATCH STATUS LTS) CAPTURE LATCH A&B-RELEASE (MOM) MONITOR SEPARATION BACKUP PASSIVE A&B-RESET (~8 SEC) PASSIVE LT-ON (LT MAY FLICKER) STRUCT LATCH A-OPEN (~8 SEC) CONTINUE ACTIVE UNDOCKING PROCEDURES	3. INITIATING BACKUP UNDOCKING 5,4,3,2,1 MARK. UNDOCKING COMPLETED.	3. НАЧИНАЮ РЕЗЕРВНУЮ РАССТЫКОВКУ 5,4,3,2,1 МАРК. РАССТЫКОВКА ВЫПОЛНЕНА.
			4. IF NO SEPARATION, ADVISE MCC OF DOCKING SYSTEM STATUS WITH MCC CONCURRENCE, SOYUZ MAY RELEASE BODY LATCHES AND OPEN PASSIVE HOOKS (PYROTECHNICS) (SEE SOYUZ RESERVE UNDOCKING Pg J/2-21)	-----	
	NO SEPARATION AFTER RELEASE OF APOLLO HOOKS AND CAPTURE LATCHES (SOYUZ PASSIVE BUT ACTIVE HOOKS CLOSED)	SOYUZ OR APOLLO ACTIVE HOOKS DID NOT OPEN	1. MAIN BUS TIE (2)-ON (UP) MONITOR FC 1 AND 3 CURRENT (PNL 3) BACKUP PASSIVE A&B-RELEASE (~8 SEC) CAPTURE LATCH A&B-RELEASE (MOM) MONITOR SEPARATION BACKUP PASSIVE A&B-RESET (~8 SEC) PASSIVE LT-ON (LT MAY FLICKER) STRUCT LATCH A-OPEN (~8 SEC)	1. INITIATING BACKUP UNDOCKING 5,4,3,2,1 MARK. UNDOCKING COMPLETED.	1. НАЧИНАЮ РАССТЫКОВКУ 5,4,3,2,1 МАРК. РАССТЫКОВКА ВЫПОЛНЕНА.
			2. WITH MCC CONCURRENCE, SOYUZ MAY OPEN ACTIVE HOOKS (PYROTECHNIC) (SEE SOYUZ RESERVE UNDOCKING Pg J/2-21)	-----	

3-4
J

DATE 6/2/75

DATE 6/2/75

BACKUP PROCEDURES FOR APOLLO ACTIVE UNDOCKING (cont.)

PHASE	SYMPTOM	PROBLEM	APOLLO PROCEDURE	INFORM SOYUZ:	
SEPARATION	GUIDE RING CAPTURE LT NOT OUT (NO VISUAL SEPARATION CUE) SHOULD BE	SENSE CIRCUIT FAILURE OR CAPTURE LATCHES DID NOT RELEASE	1. ADVISE MCC AND SOYUZ MONITOR SOYUZ COUNTDOWN TO SOYUZ BODY LATCH RELEASE	1. APOLLO CAPTURE LATCHES WILL NOT RELEASE. RELEASE YOUR BODY MOUNTED LATCHES.	1. ЗАМЕЛКИ КОЛЬЦА "АПОЛЛОНА" НЕ ОТКРЫВАЮТСЯ. ОТКРОЙТЕ ВАШИ ЗАМЕЛКИ КОРПУСА.
			2. IF STILL NO UNDOCKING, GO TO STANDARD DOCKED CONFIGURATION (Pg J/5-1) ADVISE MCC AND SOYUZ UNDOCKING DELAYED 1 REV.	-----	

BACKUP PROCEDURES FOR APOLLO PASSIVE DOCKING

PHASE	SYMPTOM	PROBLEM	APOLLO PROCEDURE	INFORM SOYUZ:	
DOCKING PREPARATION	STRUCT LATCH OPEN LT NOT ON  SHOULD BE  OR  (ACTIVE HOOKS MAY BE CLOSED)	SENSE CIRCUIT FAILURE OR ACTIVE HOOKS NOT OPEN	1. MAIN BUS TIE B/C-ON (UP) MONITOR FC 3 CURRENT (PNL 3) STRUCT LATCH B-OPEN (~8 SEC) MONITOR STATUS LT STRUCT LATCH B-OFF (CTR)	-----	
			2. MAIN BUS TIE (2) - ON (UP) MONITOR FC 1 AND 3 CURRENT (PNL 3) STRUCT LATCH A&B-OPEN (~4 SEC) MONITOR STATUS LT STRUCT LATCH A&B-OFF (CTR)	-----	
			3. CONTINUE PASSIVE DOCKING	-----	
	PASSIVE LT NOT ON  SHOULD BE 	SENSE CIRCUIT FAILURE OR GUIDE RING NOT FULLY RETRACTED OR PASSIVE HOOKS NOT CLOSED OR BODY LATCHES NOT LOCKED	1. MAIN BUS TIE B/C-ON (UP) MONITOR FC 3 CURRENT (PNL 3) GUIDE RING B-RETRACT (~40 SEC) MONITOR STATUS LT GUIDE RING B-OFF (CTR)	-----	
			2. MAIN BUS TIE (2) - ON (UP) MONITOR FC 1 AND 3 CURRENT (PNL 3) BACKUP PASSIVE A&B-RESET (~8 SEC) PASSIVE LT-ON (LT MAY FLICKER) STRUCT LATCH A-OPEN (~8 SEC)	-----	
			3. SEE CSM MALF PROC SYMPTOM 1 (Pg 14-3)	3. WE ARE HAVING DIFFICULTY WITH DOCKING PREPARATION. STANDBY.	3. У НАС ТРУДНОСТИ ПРИ ПОДГОТОВКЕ К СТЫКОВКЕ. БУДЬТЕ НА ПРИЕМЕ.

3-6
J

DATE 6/2/75

DATE 6/2/75

BACKUP PROCEDURES FOR APOLLO PASSIVE DOCKING (cont.)

PHASE	SYMPTOM	PROBLEM	APOLLO PROCEDURE	INFORM SOYUZ:	
CAPTURE	GUIDE RING CAPTURE LT NOT ON  SHOULD BE 	SENSE CIRCUIT FAILURE OR SOYUZ CAPTURE LATCHES DID NOT ENGAGE	1. AWAIT SOYUZ CAPTURE LT STATUS IF POSITIVE, CONTINUE PASSIVE DOCKING	1. NO CAPTURE.	1. НЕТ СЦЕПКИ.
			2a. THRUST ASAP (THC -X~1.0 SEC) IF CAPTURE, CONTINUE PASSIVE DOCKING 2b. IF NO CAPTURE, STATION KEEP AND VERIFY APOLLO PASSIVE INDICATION AND ADVISE MCC REATTEMPT PASSIVE DOCKING WITH MCC AND SOYUZ CONCURRENCE	2a. THRUSTING -X TO CHECK CAPTURE. 2b. MCC ADVISE REQUIRED. STANDBY. APOLLO READY TO REPEAT DOCKING.	2a. ПОДАЙ ИМПУЛЬС -Х ЧТОБЫ ПРОБЕРНУТЬ СЦЕПКУ. 2б. ТРЕБУЕТСЯ РЕКО- МЕНДАЦИЯ ЦУПа. БУДЬТЕ НА ПРИЕМЕ. "АПОЛЛОН" ГОТОВ ПОВТОРИТЬ СТЫ- КОВКУ.
INTERFACE CONTACT	STRUCT RING CONTACT LT NOT ON  SHOULD BE 	SENSE CIRCUIT OR SOYUZ GUIDE RING DID NOT RETRACT	1. AWAIT SOYUZ INTERFACE MATE LT STATUS	1. NO RETRACTION.	1. НЕТ СТЫКИБАНИЯ.
			2. MONITOR STATUS LT	2. DOCKING COMPLETED.	2. СТЫКОВКА ВЫПОЛНЕНА.
			3. ADVISE MCC	3. MCC ADVISE REQUIRED. STANDBY.	3. ТРЕБУЕТСЯ РЕКО- МЕНДАЦИЯ ЦУПа. БУДЬТЕ НА ПРИЕМЕ.
STRUCTURAL LATCHES PRELOADED	SOYUZ INTERFACE SEALS COMPRESSED LT NOT ON	SOYUZ ACTIVE HOOKS DID NOT CLOSE	1. MCC REQUEST APOLLO TO CLOSE ACTIVE HOOKS MONITOR FC 1 CURRENT (PNL 3) STRUCT LATCH A-CLOSE (~8 SEC) MONITOR STRUCT LATCH CLOSE LT-ON STRUCT LATCH A-OFF (CTR)	1. CLOSING APOLLO ACTIVE HOOKS.	1. ЗАКРЫВАЮ АКТИВ- НЫЕ КРЮКИ "АПОЛ- ЛОНА".

3-7

BACKUP PROCEDURES FOR APOLLO PASSIVE UNDOCKING


PHASE	SYMPTOM	PROBLEM	APOLLO PROCEDURE	INFORM SOYUZ:	
SEPARATION	GUIDE RING CAPTURE LT NOT OUT (STRUCT RING CONTACT LT NOT OUT AND NO VISUAL SEPARATION CUE)  SHOULD BE 	SOYUZ CAPTURE LATCHES DID NOT RELEASE OR SOYUZ ACTIVE HOOKS DID NOT RELEASE	1. SOYUZ REQUEST APOLLO BACKUP UNDOCKING MONITOR FC 1 AND 3 CURRENT (PNL 3) (SEE APOLLO BACKUP UNDOCKING Pg J/2-17)	-----	
		APOLLO PASSIVE HOOKS AND BODY LATCHES DID NOT RELEASE	2. ADVISE MCC (SEE SOYUZ RESERVE UNDOCKING Pg J/2-21)	-----	

DATE 6/2/75

CONTINGENCY DOCKING SYSTEM EXTENSION VERIFICATION

PNL
-30:00

CM4/NK(B2)/300MM(A4)
LENS BRKT(A5, DAC MOUNT(U1))




STRUCT LATCH OPEN LT-ON (VERIFY)
PASSIVE LT-ON (VERIFY)

ROTATE CAMERA TO PLACE SMALLEST VISIBLE
LINE ON TARGET IN THE RANGEFINDER.
FOCUS CAMERA (FROM LOW END OF LENS SCALE)
AND RECORD RANGE.

WARNING: DO NOT DISTURB CAMERA UNTIL
GUIDE RING IS EXTENDED.

MCC WILL ADVISE WHEN TO EXTEND
AND RETRACT GUIDE RING.

0:00 GUIDE RING A-EXTEND (~40 SEC)
(MAY CAUSE JET FIRINGS)



PASSIVE LT-OUT
GUIDE RING EXTD LT-ON

GUIDE RING A-OFF (CTR)
FOCUS CAMERA (FROM LOW END OF LENS SCALE)
ON THE SAME LINE AND RECORD RANGE.


RANGE AT EXTENSION _____

RANGE AT RETRACTION _____

DISTANCES EXTENDED _____

COMPUTE GUIDE RING EXTENSION DISTANCE (RANGE
AT EXTENSION MINUS RANGE AT RETRACTION).

2



GUIDE RING A-RETRACT (~40 SEC)
GUIDE RING EXTD LT-OFF
PASSIVE LT-ON

GUIDE RING A-OFF (CTR)

RESTOW CAMERA ASSEMBLY COMPONENTS

DATE 6/2/75

DOCKING SYSTEM
(CAMERA)

J
4-2

THIS PAGE INTENTIONALLY BLANK

DOCKING SYSTEM
(CAMERA)

DATE 6/2/75

J
5-1

STANDARD APOLLO DOCKED CONFIGURATION

STANDARD DOCKED
CONFIGURATION

PNL

P00
V44E N87 R1 11111
R2 00146
R3 00000
N89 R1 +05000(RATE 0.5 DEG/SEC)
R2 +00050(DBD 0.5 DEG)

V45E(ACTIVATE DOCKED DAP)

RHC(BOTH)-LOCKED
THC-LOCKED

1 EMS FUNC/MODE-OFF/STBY
FDAI SCALE-5/1
FDAI SELECT-1/2
FDAI SOURCE-ATT SET
ATT SET-GDC
LIMIT CYCLE-OFF
DBD/RATE-MIN/HI
THC PWR-OFF
RHC PWR NORMAL(2)-OFF
RHC PWR DIRECT(2)-OFF

DATE 6/2/75

8 * IF SCS ATTITUDE HOLD REQD: *

*	AUTO RCS SELECT :	A/C ROLL(4)-MNA/MNB	*
*		: B/D ROLL(4)-OFF	*
*		: C3,A4,D3,B4-MNA/MNB	*
*		: A3,C4,B3,D4-OFF	*

1 * FDAI SELECT-1 *

*	BMAG MODE(3)-ATT 1/RATE 2	*
*	MAN ATT(3)-RATE CMD	*
*	SC CONT-SCS	*

MAN ATT(ROLL)-MIN IMP
MAN ATT(PITCH & YAW)-RATE CMD
SC CONT-CMC
CMC MODE-AUTO
BMAG MODE(3)-RATE 2

STANDARD DOCKED
CONFIGURATION

J
5-2

PNL
2

GUIDE RING A&B-OFF(CTR)
STRUCT LATCH A&B-OFF(CTR)



ACTIVE DOCKING SYSTEM:

GUIDE RING CAPTURE LT-ON
STRUCT RING CONTACT LT-ON
STRUCT LATCH CLOSE LT-ON

* PASSIVE DOCKING SYSTEM: *

*		STRUCT LATCH OPEN LT-ON	*
*		GUIDE RING CAPTURE LT-ON	*
*		PASSIVE LT-ON	*
*		STRUCT RING CONTACT LT-ON	*

- 2 SM RCS PSM PRPLNT TB(4)-GRAY
SM RCS PRIM PRPLNT TB(4)-BP
SEC PRPLNT TB(4)-BP
SM RCS QUAD HELIUM TB(4)-BP
- 3 VHF RANGING-OFF
- 5 CB G&N IMU(2)-CLOSED
CB G&N IMU HTR(2)-CLOSED
CB G&N CMPTR(2)-CLOSED
MAIN BUS TIE(2)-OFF
- 7 FDAI/GPI PWR-BOTH
LOGIC PWR 2/3-ON(UP)
SCS ELECTRONICS PWR-GDC/ECA
SIG CONDR/DRIVER BIAS PWR 1-AC1
SIG CONDR/DRIVER BIAS PWR 2-AC2
BMAG PWR(2)-ON

DATE 6/2/75

J
5-3

PNL
8 AUTO RCS SELECT : A/C & B/D ROLL(8)-MNA/MNB
: PITCH & YAW(8)-OFF
* IF SCS REQD: *
* A/C ROLL(4)-MNA/MNB(VERIFY) *
* B/D ROLL(4)-OFF(VERIFY) *
* C3,A4,D3,B4-MNA/MNB(VERIFY) *
* A3,C4,B3,D4-OFF(VERIFY) *

13 FDAI(2)-INRTL

15 COAS PWR-OFF

100 G&N PWR/OPTICS-OFF
G&N PWR/IMU-ON(UP)

122 OPTICS ZERO-ZERO

274 DOCKING SYSTEM A:
CB IND LOGIC MNA-OPEN
CB IND PWR AC1-OPEN
CB CONTROL BAT A-OPEN
CB MOTORS AC1(3)-OPEN
CB DM POWER(2)-CLOSED(VERIFY)

DOCKING SYSTEM B:
CB IND LOGIC MNB-OPEN
CB IND PWR AC2-OPEN
CB CONTROL BAT B-OPEN
CB MOTORS AC2(3)-OPEN

◀INFORM SOYUZ : DOCKING SYSTEM POWER OFF.

DATE 6/2/75

J
6-1

APOLLO DOCKED ORIENTATION MANEUVERS

ASSUMES STANDARD APOLLO DOCKED
CONFIGURATION(J/5-1)

ASSUMES P52 COMPLETED AND GDC ALIGNED TO IMU

PNL

V44E N87 R1 11111
R2 00146
R3 00000
N89 R1+05000(RATE 0.5 DEG/SEC)
R2+00050(DBD 0.5 DEG)

1 CMC MODE-FREE
V45E
CMC MODE-AUTO

DBD/RATE-MIN/HI(VERIFY)
RHC PWR NORMAL #2-AC/DC
RHC#2-UNLOCKED

8 *IF SCS CONTROL REQD: *
* AUTO RCS SELECT : A/C ROLL(4)-MNA/MNB *
* : B/D ROLL(4)-OFF *
* : PITCH & YAW(8)-MNA/MNB *
1 * FDAI SELECT-1 *
* MAN ATT(3)-RATE CMD *
* SC CONT-SCS *
* BMAG MODE(3)-ATT 1/RATE 2 *
* SET ASCP THUMBWHEELS TO PAD ANGLES *

P00
V62E
V49E,LOAD N22 WITH PAD ANGLES

◀INFORM SOYUZ : READY FOR ORIENTATION.

INFORM APOLLO : READY FOR	ORIENTATION.
(INERTIAL)	
(ORBITAL)	
(SOLAR)	
(UNDOCKING)	

DOCKED MANEUVERS

DATE 6/2/75

J
6-2

PNL ◀ INFORM SOYUZ : ORIENTATION ESTABLISHED.

V44E N87 R1 11111

R2 00146

R3 00000

N89 R1+05000(RATE 0.5 DEG/SEC)

R2+00500(DBD 5.0 DEG)

1 CMC MODE-FREE

V45E

CMC MODE-AUTO

RHC#2-LOCKED

DOCKED MANEUVERS

DATE 6/2/75

USA/USSR Photo & Movie Operations

DATA ACQUISITION CAMERA (DAC)

1. SET SHUTTER SPEED. Position SPEED knob to desired setting. For TIME exposures, SPEED must be set to 1/60.
2. SET SEQUENCING MODE. Five are available. Position mode switch to 2, 6, 12, or 24fps or TIME. Mode can be changed while camera running.
3. OPERATE DAC USING ON/OFF BUTTON. For 2, 6, 12fps, and TIME modes, depress and release button to start camera, then repeat to stop. For 24fps button must be depressed continually for camera to run.
4. GREEN OPERATE LIGHT indicates camera operation. It will come on for 6 sec when power is applied to camera; this indicates a good circuit. (Small micro-switch at cam/magazine interface must be depressed to close circuit.) When cam is operating green light will flash at selected frame rate. For TIME exposure, light flashes once at shutter closing.
5. TEST. When camera is ready for operation a short 2 sec burst will indicate that everything is working properly.

LENSES - 5mm/10mm/25mm/75mm

1. INSTALL LENS ON DAC. Align orange index marks on lens and DAC, insert, and rotate CW to lock. Reverse to remove lens.
2. MAKE LENS SETTINGS. Using settings from checklist or the spotmeter, set fstop on the aperture ring. Detents are at full stops; half stops can be selected. Set focus ring for desired focus distance. (Focus is fixed on 5mm lens.) Detents are at infinity and one other setting (10mm - 2', 75mm - 10'). No detents for the 25mm.

DATE 6/2/75

PHOTO/MOVIE OPS

140 FT MAGAZINE

1. INSTALL FILM MAGAZINE. Verify set of perf's is aligned with orange index line in mag opening. If not, move film per arrow no more than 2 frames total. Install mag on DAC. Tighten DAC locknut CW (green operate light should come on for approx 6 sec then go off). Reverse to remove mag.
2. CHECK FILM INDICATOR. Gross amount of film remaining (accurate to about 10%) is indicated by ball against % scale.
3. RED END-OF-FILM LIGHT indicates film depletion. It will initially illuminate when 1.8 meters (6 feet) of film remains and will stay on continuously. Camera will continue running when film is depleted.

POWER CABLE

1. ATTACH POWER CABLE. Align orange index marks of cable connector and DAC power connector, insert, and rotate CW. Reverse to remove. Cable attaches to UTILITY POWER connector in S/C.

SJ-BOX ADAPTER

***** TO BE USED ONLY IN SOYUZ *****

1. CONNECT ADAPTER (male end) to DAC power cable, then adapter (female end) to SJ-box.

FUSES

1. INSTALL REPLACEMENT FUSE (if reqd). Fuse is inserted in corner of camera body. Spares are located in R3 (Data Card Kit).

PHOTO/MOVIE OPS

DATE 6/2/75

DAC TIMING CABLE

1. ATTACH DAC TIMING CABLE (if reqd). Connect DAC end to POWER connector same as power cable. Connect S/C end to pnt 227. Turn SCI INST PWR sw to PWR.

REMOTE CONTROL CABLE

1. ATTACH REMOTE CONTROL CABLE (if reqd). Insure DAC is stopped. Connect cable by aligning blue index marks on cable and rearmost DAC connector, inserting and rotating connector. Operate DAC at 24fps only by placing toggle sw in the ON position. Camera will run until sw is placed in OFF. Remote cable will attach to DAC by means of the mounting shoe.

DAC MOUNT

1. ATTACH DAC MOUNTING BRACKET to camera (if reqd). Slide rail into dovetail. Bracket can be mounted above LH or RH rndz windows to dovetail.

U-MOUNT

1. ATTACH UNIVERSAL MOUNT to camera (if reqd). Slide rail into dovetail with lens pointing in direction of arrow and lock. Depress button to remove. Attach bracket to any TV camera receptacle by inserting and rotating until locked. Set X,Y, and Z angles per checklist. Depress lock button to remove from receptacle.

RIGHT ANGLE MIRROR

1. ATTACH RIGHT ANGLE MIRROR (if reqd). Align orange index lines of mirror and lens. Insert mirror lugs into lens mounting. Rotate mirror CW until snap locked.

DATE 6/2/75

J
7-4

RINGSIGHT

1. ATTACH RING SIGHT (if reqd). Slide into shoe on top of camera.

AUXILLARY PHOTO LIGHT

1. MOUNT LIGHT to DAC, to Velcro pad on S/C wall, or handhold (as called for in C/L).
2. TURN LIGHT ON using recessed switch. LOW position lights one tube ; HIGH lights both tubes. Light has a useful life of 18 hrs (6 hr/batt). BE SURE TO TURN OFF WHEN NOT REQD.
3. CHANGE BATTERIES (A5)

DATE 6/2/75

STILL CAMERA FK-6

1. Lens: 3.5/45 mm
Focusing range: 0.5 m - infinity
2. Apertures are set by aligning the desired f-stop with the principal reference mark on the lens housing.
3. The camera is focused optically using frosted glass with a range finder in the center of the field or by setting the distance scale on the lens.
4. DEPTH OF FIELD is determined by using the distance scale with a supplementary lens scale, and is checked by depressing the depth of field monitor lever.
5. The shutter provides standard speeds of 1/2 to 1/1000 sec and speed 'B' (time exposure).
6. The cocking lever is interlocked with the film advance mechanism, with the frame counter and with the mechanism which sets the mirror into operating position.
7. Shutter speed can be set with the shutter either tripped or cocked by aligning the selected value on the exposure ring with the index on the upper part of the camera housing.
8. The frame counter is automatically reset in initial position 'H' when the back plate of the camera is opened.
9. Photos are taken until the letter 'K' appears in the frame counter window. The remaining leader is advanced by means of the cocking lever but without tripping the shutter.
10. Film is obtained from canisters 7, 8, 9 & 10.

DATE 6/2/75

2 SECOND JOINT ACTIVITY PERIOD PHOTO PROCEDURES (IN APOLLO)									
INITIAL SETUP: 606/DAC01(RHTSB)/5mm(RHTSB)/CI04(F2) - PWR CABLE(PNL 16), *** REMOTE(RHTSB) X=330 Y=270 Z=290/PIN IN HOLE #1									
231/DAC02(LHTSB)/10mm(RHTSB)/CI09(F2) - PWR CABLE(PNL 100), REMOTE X=270 Y=320 Z=355/PIN IN HOLE #1									
PORTABLE LIGHT - UNDER SPEAKER BOX(PL1) FACING LEB									
*** MOUNT DAC TO TV CAM									
PHOTO #	ACTIVITY	CAM LOC	MAG LOC	LENS	X Y Z	PIN #	LENS SET- TING	PORT LT LOC	SHOOTING DIRECTIONS
2.1	SC XFER TO CM	DAC01 *** 606	CI04	5mm	330 270 290	1	f2.0 1/60 --	PL1 FACING LEB	SHOOT UP MAG
P/M 8.1A	SC XFER TO CM	DAC02 231	CI09	10mm	270 320 355	1	f1.8 1/60 6'	PL1 FACING LEB	2 MIN
P/M 8.2A	DP WELCOME SC	DAC02 [HH]	CI09	10mm			f1.8 1/60 3'	POINT AT DP	30 SEC
2.2	CM TOUR	DAC01 606	CI05 (poc ket)	5mm	320 180 260	2	f2.0 1/60 --	PL1 FACING LH COUCH	SHOOT UP MAG
P/M 8.3A	CM TOUR	FK-6	N7	45mm			f3.5 1/15	PL1 FACING LH COUCH	2-3FR
P/M 8.3.1A	CM TOUR - AC	DAC02 HH	CI09	10mm			f1.8 1/60 3'	PL1 FACING LH COUCH	30 SEC
P/M 8.4A	CM TOUR - SC	DAC02 HH	CI09	10mm			f1.8 1/60 3'	PL1 FACING LH COUCH	30 SEC
2.2.1	PLAQUE JOINING	DAC01 *** 606	CI06 (poc ket)	5mm	330 270 290	1	f2.0 1/60 --	PL1 FACING LEB	30 SEC
P/M 8.5A	PREPARING FOR TOUR OF USSR	DAC01 [11]	CI06	5mm	65 20 162	1	f2.0 1/60 --	PL1 FACING WINDOW 3	1 MIN
P/M 8.6A	PREPARING FOR TOUR OF USSR	DAC02 HH	CI10 (LH TSB)	10mm			f1.8 1/60 3'	PL1 FACING WINDOW 3	20 SEC
P/M 8.7A	PREPARING FOR TOUR OF USSR	FK-6	N7	45mm			f3.5 1/15	PL1 FACING WINDOW 3	2-3FR
P/M 8.8A	SOYUZ THRU CH2	DAC02 HH	CI10	10mm			f1.1 1/500 15'	NO LIGHT	1 MIN
P/M 8.9A	SOYUZ THRU CH2	FK-6	N7	45mm			f8 1/250	NO LIGHT	6-8FR

DATE 6/2/75

PHOTO #	ACTIVITY	CAM LOC	MAG LOC	LENS	X Y Z	PIN #	SET- TING	PORT LT LOC	SHOOTING DIRECTIONS
2.3	TOUR OF USSR	DAC01 11	CI06	5mm	65 20 162	1	f2.0 1/60 --	NO LIGHT	1 MIN
P/M 8.10A	AC & SC LOOK OUT WINDOW 3	FK-6	N8	45mm			f3.5 1/15	NO LIGHT	3-4FR
2.4	SC USING EXERCISER	DAC02 HH	CI10	10mm			f1.8 1/60 3'	MOUNT ON CAMERA	30 SEC
2.5	MEAL	DAC01 *** [606]	CI06	5mm	[330] [270] [290]	[1]	f2.0 1/60 --	PL1 FACING LEB	1 MIN
P/M 8.11A	MEAL	DAC02 [607]	CI10	10mm	[302] [262] [317]	[1]	f1.8 1/60 [5]	PL1 FACING LEB	20 SEC
P/M 8.12A	MEAL - AC & DP	DAC02 [HH]	CI10	10mm			f1.8 1/60 [3]	MOUNT ON CAMERA	30 SEC
P/M 8.13A	MEAL - AC & SC	DAC02 HH	CI10	10mm			f1.8 1/60 3'	MOUNT ON CAMERA	30 SEC
P/M 8.14A	MEAL - AC & SC	Fk-6	N8	45mm			f3.5 1/15	PL1 FACING LEB	3-4 FR
P/M 8.15A	MEAL	FK-6	N8	45mm			f3.5 1/15	PL1 FACING LEB	3-4 FR
P/M 8.16A	FURNACE OPS	FK-6	N9	45mm			f3.5 1/15	PL7 FACING FURNACE	3-4 FR
2.6	FURNACE OPS	DAC02 [857]	CI07 (DP)	5mm	[0] [270] [350]	[3]	f2.0 1/60 --	PL7 FACING FURNACE	SHOOT UP MAG
P/M 8.17A	FURNACE OPS AC & SC	DAC01 [872]	CI11 (LH TSB)	5mm	[268] [250] [350]	[2]	f2.0 1/60 --	PL7 FACING FURNACE	2 MIN
P/M 9.1A	AC & SC IN DM	FK-6	N9	45mm			f3.5 1/15	PL7 FACING FURNACE	3-4 FR
P/M 9.2A	SC TAKES CARTRIDGES AND XFERS TO OM	DAC01 872	CI11	5mm	268 250 350	2	f2.0 1/60 --	PL4 FACING FURNACE	SHOOT UP MAG

3 THIRD JOINT ACTIVITY PERIOD PHOTO PROCEDURES (IN APOLLO)									
INITIAL SETUP: 606/DAC02(LH TSB)/5mm/CI08(F2) - PWR CABLE(PNL 16), *** REMOTE X=330 Y=270 Z=290/PIN IN HOLE #1									
*** MOUNT DAC TO TV CAM									
PHOTO #	ACTIVITY	CAM LOC	MAG LOC	LENS	X Y Z	PIN #	LENS SETTING	PORT LT LOC	SHOOTING DIRECTIONS
P/M 9.3A	OP PREPARES TV CAMERA FOR PRESS CONF	FK-6 (LH TSB)	N9	45mm			f3.5 1/15	PL1 FACING RH COUCH	3-4 FR
P/M 9.4A	PRESS CONF	DAC01 (LH TSB) 607	CI12 (LH TSB)	10mm (LH TSB)	302 262 320	1	f1.8 1/60 6'	PL1 FACING LEB	2 MIN
3.1	PRESS CONF	DAC02 *** 606	CI08	5mm	330 270 290	1	f2.0 1/60 --	PL1 FACING LEB	2 MIN
P/M 9.5A	PRESS CONF	FK-6	N10	45mm			f3.5 1/15	PL1 FACING LEB	2 FR
3.2	MICROBIAL EX FE SAMPLING	DAC02 *** 606	CI08	5mm	330 270 290	1	f2.0 1/60 --	PL1 FACING LEB	2 MIN
P/M 9.6A	MICROBIAL EX FE SAMPLING	FK-6	N10	45mm			f3.5 1/15	PL1 FACING LEB	2-3 FR
P/M 9.7A	MICROBIAL EX CP SAMPLING	DAC01 607	CI12	10mm	302 262 320	1	f1.8 1/60 6'	PL1 FACING LEB	2 MIN
P/M 9.8A	MICROBIAL EX CP SAMPLING	FK-6	N10	45mm			f3.5 1/15	PL1 FACING LEB	2-3 FR
P/M 9.9A	PERF OF SYMB ACTIVITIES	FK-6	N10	45mm			f3.5 1/15	PL1 FACING LEB	3-4 FR

DATE 6/2/75

FIRST JOINT ACTIVITY PERIOD PHOTO PROCEDURES (IN SOYUZ)									
PHOTO #	ACTIVITY	CAM LOC	MAG LOC	LENS	X Y Z	PIN #	LENS SETTING	LIGHTING	SHOOTING DIRECTIONS
1.2S	SIGNING OF DOCKING CERTIFICATE	DAC01 TA1	CS01	5mm	0 90 300	3	f4 1/60	SL1-ON PLU-ON/T1	2 MIN
1.3S	SIGNING OF DOCKING CERTIFICATE	NK		35mm			f11 1/60 FOCUS	FLASH RANGE 2	4 FR
1.4S	MEAL	DAC01 TA1	CS01	5mm	0 90 300	3	f4 1/60	SL1-ON PLU-ON/T1	SHOOT UP MAG
1.5S	PANORAMA OF OM	DAC01 HH	CS02 TSB	10mm			f4 1/60 3	SL1-ON PLU-ON/T1	USE AS MUCH FILM AS DESIRED
1.6S	MEAL	NK		35mm			f11 1/60 FOCUS	FLASH RANGE 2	8-10 FR

DATE 6/2/75

J
7-10

SECOND JOINT ACTIVITY PERIOD PHOTO PROCEDURES (IN SOYUZ)							
PHOTO #	ACTIVITY	CAM LOC	MAG LOC	LENS	LENS SETTING	LIGHTING	SHOOTING DIRECTIONS
P/M 8.4	FE PERFORMING ZFF EXPERIMENT	K-3A HH	N3 CON3	20mm	f2.0	SL1-ON	20SEC
2.1S	TOUR OF DV	NK		35mm	f11.1/60 FOCUS	FLASH RANGE 2	8-10 FR
2.2S	JOINING OF PLAQUE	NK					2 FR
2.3S	CP USING EXERCISER	NK					2 FR
2.4S	FE DOING EARTH OBS	NK					2 FR
2.5S	FE PREPARING FOOD	NK			1	1	2 FR

DATE 6/2/75

J
7-11

THIRD JOINT ACTIVITY PERIOD PHOTO PROCEDURES (IN SOYUZ)

PHOTO #	ACTIVITY	CAM LOC	MAG LOC	LENS	LENS SETTING	LIGHTING	SHOOTING DIRECTIONS
P/M 9.2	SC CHECKS HATCH INTEGRITY	K-3A HH	N3 CON3	12.5mm	f2.0	SL1-ON SL2-ON	20 SEC
P/M 9.3	SC WORKS WITH PRESSURE LEAK C&D	K-3A HH	N3	20mm	f2.0	SL1-ON SL2-ON	15 SEC
P/M 9.6	SC COMMUNICATES WITH MCC	K-3A HH	N3	20mm	f2.0	SL1-ON PLU-ON/T1	20 SEC
3.1S	PRESS CONFERENCE - SC	NK		35mm	f11, 1/60 FOCUS	FLASH RANGE 2	2 FR
3.2S	PRESS CONFERENCE - AC	NK					2 FR
3.3S	MICROBIAL EXCHANGE SC SAMPLES SOYUZ	NK					3 FR
3.4S	AC DOING TOUR OF FLORIDA	NK					2 FR
3.5S	EXCHANGE OF SEEDS	NK			1	1	2 FR
P/M 10.2	MICROBIAL EXCHANGE DP SAMPLES SC	K-3A HH	N4 CON3	12.5mm	f2.0	SL1-ON SL2-ON	20 SEC

DATE 6/2/75

J
8-1

CM TV CUE CARD

TV
2.1



LEB PRESS CONF.
TOUR, FOOD DEMO

SHOE - LEFT
ARROW - REAR
X,Y,Z - 10,175,105
F,ZOOM,FOC - 3.5,9,10
CAMR - AVG,SLAVE,LINEAR
LOC - 605 (HOLE 4)
LIGHTS - MAX & PL (STRUT LTS
OFF FOR TOUR)
FILTERS REMOVED (U2)

TV
2.2



MAIN PANEL

SHOE - LEFT
ARROW - REAR
X,Y,Z - 305,90,45
F,ZOOM,FOC - 3.5,9,10
CAMR - AVG,SLAVE,LINEAR
LOC - 231 (HOLE 1)
LIGHTS - MAX - TV FILTERS
INSTALLED (U2)

TV
2.9



OTW GROUND TOURS

SHOE - LEFT
ARROW - REAR
X,Y,Z - 20,90,225
F,ZOOM,FOC - 22,100,inf (ZOOM LENS)
CAMR - AVG,SLAVE,LINEAR
LOC - 605 (HOLE 1)
LIGHTS - MAX EXCEPT RH INTERIOR
LTS OFF

TV
2.10



CM SIDE HATCH
AREA

SHOE - LEFT
ARROW - REAR
X,Y,Z - 290,40,200
F,ZOOM,FOC - 3.5,9,10
CAMR - AVG,SLAVE,LINEAR
LOC - 11 (HOLE 3)
LIGHTS - MAX & PL- TV FILTERS
INSTALLED (U2)

DATE 6/2/75

TV OPS

J
8-2

TV
2.14



HATCH 1 AREA

SHOE - LEFT
ARROW - REAR
X,Y,Z - 260,10,5
F,ZOOM,FOC - 3.5,9,10
CAMR - AVG,SLAVE,LINEAR
(MASTER IF OM CAMR OFF)
LOC - 11 (HOLE 4)
LIGHTS - MAX

TV
2.15



CDR COUCH

SHOE - LEFT
ARROW - REAR
X,Y,Z - 80,175,95
F,ZOOM,FOC - 3.5,9,10
CAMR - AVG,SLAVE,LINEAR
LOC - 11 (HOLE 4)
LIGHTS - MAX - TV FILTERS
INSTALLED (U2)

TV
2.18



AC & CP COUCHES

SHOE - LEFT
ARROW - REAR
X,Y,Z - 105,190,65
F,ZOOM,FOC - 3.5,9,10
CAMR - AVG,MASTER,LINEAR
LOC - 11 (HOLE 4)
LIGHTS - MAX - TV FILTERS
INSTALLED (U2)

TV
2.19



OTW OF SOYUZ, DM

SHOE - LEFT
ARROW - REAR
X,Y,Z - 325,90,155
F,ZOOM,FOC - 22,25,15
CAMR - AVG,SLAVE,LINEAR
LOC - 606 (HOLE 1)
LIGHTS - RH WALL LIGHT - OFF
REMARKS - READJUST ZOOM AS RANGE
REQUIRES
- SELECT PEAK IF WHITE
CONTENT OF SCENE DROPS
BELOW APPROX 10%

TV OPS

DATE 6/2/75

J
8-3

SOYUZ TV CUE CARD

TV
2.7



OM PANEL & TOUR

SHOE - RIGHT
ARROW - REAR
X,Y,Z - 0,0,105
F,ZOOM,FOC - 3.5,9,10
CAMR - AVG,MASTER,LINEAR
LOC - TA3 (HOLE 4)
LIGHTS - GRP I-OFF,GRP II-ON,
PLU-ON/T2
- WORK LTS - MAX

TV
2.8



DV INTERIOR & TOUR

SHOE - LEFT
ARROW - REAR
X,Y,Z - 30,70,20
F,ZOOM,FOC - 3.5,9,10
CAMR - AVG,MASTER,LINEAR
LOC - TA4 (HOLE 1)
LIGHTS - SPECIAL LTS-ON,
SPECIAL LT 9-OFF
- WORK LTS - MAX
- INSTALL RH WINDOW
SHADE

TV
2.12




OM SOFA

SHOE - LEFT
ARROW - REAR
X,Y,Z - 340,0,65
F,ZOOM,FOC - 3.5,9,10
CAMR - AVG,MASTER,LINEAR
LOC - TA1 (HOLE 2)
LIGHTS - GRP II-OFF,GRP I-ON,
PLU-ON/T1
- WORK LTS - MAX

DATE 6/2/75

J
8-4

TV
2.16



HATCH 4 AREA

SHOE - TOP
ARROW - RIGHT
X,Y,Z - 290,170,0
F,ZOOM,FOC - 3.5,9,10
CAMR - AVG,MASTER,LINEAR
LOC - TA2 (HOLE 1)
LIGHTS - GRP I-OFF, GRP II-ON,
PLU-ON/T3
WORK LTS - OFF

TV
2.17



OM WINDOW AREA

SHOE - LEFT
ARROW - REAR
X,Y,Z - 325,0,75
F,ZOOM,FOC - 3.5,9,10
CAMR - AVG,MASTER,LINEAR
LOC - TAT (HOLE 2)
LIGHTS - GRP II-OFF, GRP I-ON,
PLU-ON/T1
- WORK LTS - MAX

DATE 6/2/75

APOLLO WASTE MANAGEMENT AND PERSONAL
HYGIENE SYSTEM OPERATION

WASTE MANAGEMENT

Urine collection

PRIMARY SYSTEM:

1. Urine Transfer System (UTS)
Obtain the UTS (R11) and verify that
the valve is closed
Attach a roll-on cuff (R11) to the
UTS receiver
Affix cuff to self
Open the UTS valve
Perform task
Close the UTS valve
Remove the roll-on cuff
Use tissue (A2) to absorb free urine
in the cuff
Stow the UTS (temporary stowage)
When convenient, transfer urine by
procedure 2. below
2. UTS/Urine bag transfer
UTS vlv - CLOSED (Verify)
Connect UTS to Urine Bag
Roll UTS Bag to transfer urine
When transfer complete, disconnect
UTS from Urine Bag & stow

BACKUP SYSTEM:

- Urine Receptacle Assembly (URA)
- Connect the urine line filter to the
urine transfer hose
 - Connect the urine transfer hose/filter to
the urine-overboard OD
 - Connect the urine receptacle to the urine
transfer hose
 - Place the URA valve to VENT
 - Remove the receptacle cover
 - Place the OVERBOARD DRAIN valve to DUMP

DATE 6/2/75

NOTE

Direct urine stream parallel to honeycomb to prevent splashback. Avoid accelerations to URA during use. Remove last drop by touching screen at top of URA.

Perform task
Flush screen and honeycomb with water gun (10 sec maximum)
Replace the receptacle cover after liquid has cleared from URA
Verify the URA valve is in VENT and purge URA for 2-5 min
Close the URA valve
Stow the URA (Retainer strap-A1) for next use with urine transfer hose connected and OVERBOARD DRAIN valve in DUMP (Verify) to allow URA to vacuum dry

Defecation

Remove fecal collection assembly from stowage (U1 or A2)
Obtain defecation collection device from assembly
Remove germicide pouch & remove protective cover
Insert germicide pouch (protective cover removed) into inner fecal bag

WARNING

If germicide pouch is accidentally ruptured, proceed as follows:
Germicide on CM surface or hardware; wipe up with tissue
Germicide on crewman's skin; blot with tissue and flush with water
Germicide in crewman's eyes; irrigate with water from water gun or soaked tissue
Germicide ingested; take magnesium compound and/or high protein food - do not induce vomiting.

DATE 6/2/75

Remove the protective covering from the lip of inner fecal bag and place into bag
Affix the inner fecal bag to self
Perform task
Seal inner fecal bag (remove air prior to sealing)
Rupture the germicide pouch
Knead contents for 4 min
Insert into the outer fecal bag & seal outer bag
To vent odors from waste stowage container:
Connect UT hose/filter to WASTE STOWAGE QD
Connect UT hose to vent QD on stowage container (A-1)
Place the WASTE STOWAGE VENT valve to VENT for 30 seconds, then CLOSE
Stow the fecal bag in waste stowage container.

Emesis

Obtain a fecal bag (U1 or A2)
Perform task
Insert the germicide pouch (protective cover removed) into inner bag
Seal the inner bag
Rupture the germicide pouch
Insert the inner bag into the outer bag and seal
To vent odors from waste stowage container:
Connect UT hose/filter to WASTE STOWAGE QD
Connect UT hose to vent QD on stowage container (A1)
Place the WASTE STOWAGE VENT valve to VENT for 30 seconds then CLOSE
Stow the outer bag in the waste stowage container.

DATE 6/2/75

J
10-1

ZONE FORMING FUNGI (AS-1)

ZFF PHOTOS

FIRST PERFORMANCE ONLY

Remove 2 ZFF devices from R-5
Mount on LEB wall (Right of
PNL 121)

Turn all cabin interior lights
on high (PNL 100,5,8 FIXED,
fullbright)

HH/NK/35/CI/CRYSTAL GROWTH FRAMING
DEVICE (U1)(12.8,1/15,1') 2FR

Hold camera and bracket assembly
against LEB with device centered
when making exposures

Log photos taken (Required every 12 +/- 3 hours)

JOINT EXPTS
AS-1, 2, 5

DATE 6/2/75

GET FILM MAG FR # DEVICE S/N

J
10-2

GET FILM MAG FR # DEVICE S/N

JOINT EXPTS
AS-1, 2, 5

DATE 6/2/75

After last performance stow in R-5
parallel to Y-Z plane

MICROBIAL EXCHANGE (AS-2)

MICROBIAL EXCHANGE CSM

Obtain MICROBIAL EXCHANGE KIT # 3

Unfold and fasten with velcro to
LEB wall

Replace used tubes in kit
reversed from stowed position

NOTE - Log next to table any
deviations of sampling
locations from TABLE 1

TABLE 1

TUBE	AREA
1	HAIR
2	AUDITORY CANALS
3	BACK OF NECK BELOW HAIR LINE
4	NOSTRILS
5	ORAL CAVITY
6	PALM

Fold kit # 3 and place in bungee
bag in LEB

DATE 6/2/75

J
10-4

Obtain MICROBIAL EXCHANGE KIT # 4
Unfold and fasten with velcro
to a convenient place

CSM SAMPLING

Swab the entire area between the
black lines where applicable
per this list

Replace used tubes in kit reversed
from stowed position

TUBE	AREA
A1	Left X-X head strut
A2	Right X-X foot strut
A3	Right hand couch stabilizer beam
A4	Between PNL 10 and 12
A5	RH flood light (side near window 4)
A6	Left hand rotational controller
A7	Right girth shelf
A8	PNL 325
A9	Area near location 607
A10	Cover of ORDEAL STOWAGE LOCKER
A11	B6 behind bag
A12	L3 inside door
A13	Top of VTR
A14	PNL 251 WASTE STOWAGE QD and URINE OVBD QD AREA
A15	Forward of PNL 225

Fold kit #4 and place in bungee
bag in LEB

DATE 6/2/75

J

10-5

UV ABSORPTION (AS-5)

COAS CAL

1. Verify COAS CAL attitude
(225,145,348)
Verify VEGA near center of COAS
PNL 1
RHC PWR NORMAL (2) - AC/DC
MAN ATT (3) - MIN IMP
SC CONT - SCS
Inhibit RCS jets - A3,C4,B3,D4
2. PNL 101
SYSTEMS TEST mtr - C,8
PNL 230 (verify)
UV COVER - off(ctr)
HE GLOW COVER - off(ctr)
EUV COVER - off(ctr)
X-RAY COVER - off(ctr)
PNL 274
ELECTROPHORESIS/COVERS MNA/MNB -
close(verify)
PNL 230
EXPERIMENT COVERS MNA/MNB - close
EXPERIMENT COVERS ARM/SAFE - ARM
UV ABSORPTION POWER - OFF
UV COVER - OPEN (1b bp for <5 sec
then gray if not gray in 15
sec -off(ctr))
UV ABSORPTION POWER - ON
Monitor SYSTEMS TEST METER PNL 101
If meter < 2.0v tell DP to pitch
S/C down
If meter > 3.0v tell DP to pitch
S/C up

If meter oscillating S/C is >1.5
DEG off center of FOV of
startracker in yaw or 3 DEG
in pitch

PITCH CALIBRATION

Help DP track star by calling out
voltage and direction
DP will MNVR S/C such that SYSTEMS
TEST MTR is centered (2.5v)
DP will Observe where star is
located in the COAS
Mark this position on COAS chart
page 10-7

DATE 6/2/75

5. YAW CALIBRATION
DP will yaw S/C left then
Give mark when meter oscillates
mark star position on COAS chart
DP will yaw S/C right and acquire
star
Give mark when meter oscillates
mark star position on COAS chart
6. PNL 230
UV ABSORPTION POWER - OFF
UV COVER - CLOSE (tb bp for <5 sec
then gray, if not gray in 15
sec - off(ctr))
UV ABSORPTION POWER - ON
EXPERIMENT COVERS ARM/SAFE - SAFE
7. Enable all RCS jets (16)
PNL 1
SC CONT - CMC
MAN ATT (3) - RATE CMD
8. Correct COAS chart for parallax

150m pitch tracking point is .8
DEG below and .3 DEG to the right
of pitch calibration point

500m pitch tracking point is .2
DEG below and .1 DEG to the right
of pitch calibration point

1000m use pitch calibration
point

DATE 6/2/75

J
10-7


UVA_SHUTDOWN

PNL 230
UV ABSORPTION LAMPS - OFF
UV ABSORPTION POWER - OFF
UV COVER - CLOSE (tb bp <5 sec
then gray, if not gray in 15
sec - off(ctr))

UVA_STOW

Obtain DRAG THRU POWER UMBILICAL
BAG(A1)
DISCONNECT cable and place
in bag
Stow bag in DM JETTISON STOWAGE
BAG

COAS RETICLE

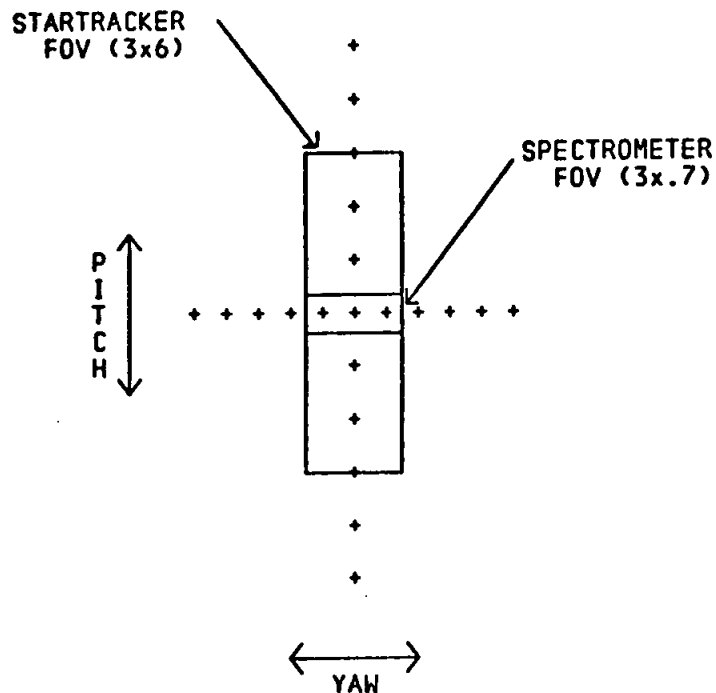

NASA-JSC

EXTRA CHECKLIST DISTRIBUTION

5/14/75
5/15/75

- BOND COPIES -

FLIGHT PLAN SUPPLEMENTMr. Dick Freund
Deico Electronics
6767 Hollister Ave.
Goleta, California 93017RENDEZVOUS BOOK (22)

CG22/S. Grega (20)

T. Keller, TRW
H2/2085LAUNCH CHECKLIST

WB5/L. Brubaker

G&C CHECKLIST

CG22/C. Lewis

SYSTEMS CHECKLIST

CG22/C. Lewis

ENTRY CHECKLISTT. Keller, TRW
H2/2085PHOTO OPS BOOK (2)JL/B. Baldwin
TN3/S. N. HardeeTV OPERATIONS BOOK (35)

AP2/B. James (5)

CB/T. Stafford

D. Slayton

V. Brand

A. Bean

R. Evans

J. Lousma

R. Overmeyer

K. Bobko

R. Truly

CG2/D. Brooks (15)

CG5/M. Broome, TRW

CG52/C. Stough/FAO

JL/B. Baldwin

VA/E. Cernan

50
CUE CARDS (24)

CG/T. Stafford

D. Slayton

V. Brand

A. Bean

R. Evans

J. Lousma

R. Overmeyer

K. Bobko

R. Truly

CG2/W. Jones, TRW (10)

CG22/C. Lewis

CG5/M. Broome, TRW/IOS (2)

TN3/S. N. Hardee (2)

CREW PROCS DECALS (22)

CB/T. Stafford

D. Slayton

V. Brand

A. Bean

R. Evans

J. Lousma

R. Overmeyer

K. Bobko

R. Truly

CG2/W. Jones, TRW (10)

CG5/M. Broome, TRW/IOS (2)

WB5/D. Nussman

JOINT OPS CHECKLIST (14)

DB2/A. Nicogossian

DD5/G. Taylor

DD63/R. Hoffman

PH/P. Jaschke

L. Williams

W. Speir

N. Stewart (TRW)

TN2/T. Giuli

TN3/N. Hardee

J. Bates

W. Eichelman

VA07/C. Amos

WB5/L. Brubaker

Dr. T. M. Donahue
Department of Physics
University of Pittsburgh
Pittsburgh, PA 15213

ASTP
CHECKLIST DISTRIBUTION LIST

5/14/75

- BOND COPIES -

FLIGHT PLAN SUPPLEMENT +
RENDEZVOUS BOOK+
HP-65 C/L
LAUNCH C/L+
G&C C/L+
SYSTEMS C/L+
JOINT OPS C/L+
DM C/L+
EXPERIMENTS C/L+

UPDATES BOOK
ENTRY C/L+
PHOTO OPS BOOK+
TV OPS BOOK+
SYSTEMS DATA
MALFUNCTION PROCS
CUE CARDS+
CREW PROCS DECALS+
ALT/CONT FLIGHT PLANS+

CG2/D. Schultz
CG22/D. Warren
CG221/G. Knori (2)
CG23/J. Wegener
CG24/J. Smith
CG25/R. Zedekar
CG5/T. Holloway
J. Doyle, Kentron (17)
CG51/W. Todd, RI (10)

KSC/LSTMP-3/R. DeCamp (12)
KSC/WSK/A. Morse (2)
NS2/O. Lindsey

PH/S. Blackmer
A. Dennett (2)
WB5/L. Brubaker (4)
WC6/M. Collins

DD4/J. Hordinsky (2)

CSDL/MS23/R. Larson
J. Dunbar

EC2/R. Grafe
EC3/D. Hughes
ED/J. Harris
ED8/H. Kuehnel
EE4/R. Dietz
EG2/G. Johnson
EG8/R. Wilson
EP12/H. White
ES12/D. Smith

HA62/Boeing/E. Bouford
HS01/Boeing

Headquarters/MAO/J. Holcomb

CB/A. Forostenko

BLDG 1720/BOB MOORE (2)

FE221/R. Powell (8)

+ Extra distribution on this item.

FM13/Data Management Office (5)

JM5/R. Magin

STD 91

SPEC

EXTRA

TOTAL

14
110