


NOTICE - WHEN GOVERNMENT DRAWINGS, SPECIFICATIONS, OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE UNITED STATES GOVERNMENT THEREBY INCURS NO RESPONSIBILITY FOR ANY OBLIGATION WHATSOEVER, AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSIONS TO MANUFACTURE, USE, OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.

1003084 E

REVISIONS 0093/			
SYM	DESCRIPTION	DATE	APPROVAL
A	REVISED PER TDRR 02056	7/17/63	<i>[Signature]</i>
B	UP GRADED TO CLASS A WITH CHANGES PER TDRR 02846	1/22/64	<i>[Signature]</i>
C	REVISED PER TDRR 08106 DR R. [Signature] CHK [Signature]	4/26/64	<i>[Signature]</i>
D	REVISED PER TDRR 20259 DR M. [Signature] CHK R.M.E. [Signature]	11/6/65	<i>[Signature]</i>
E	REVISED PER TDRR 21817 DR R. [Signature] CHK CAP [Signature]	9/16/65	<i>[Signature]</i>

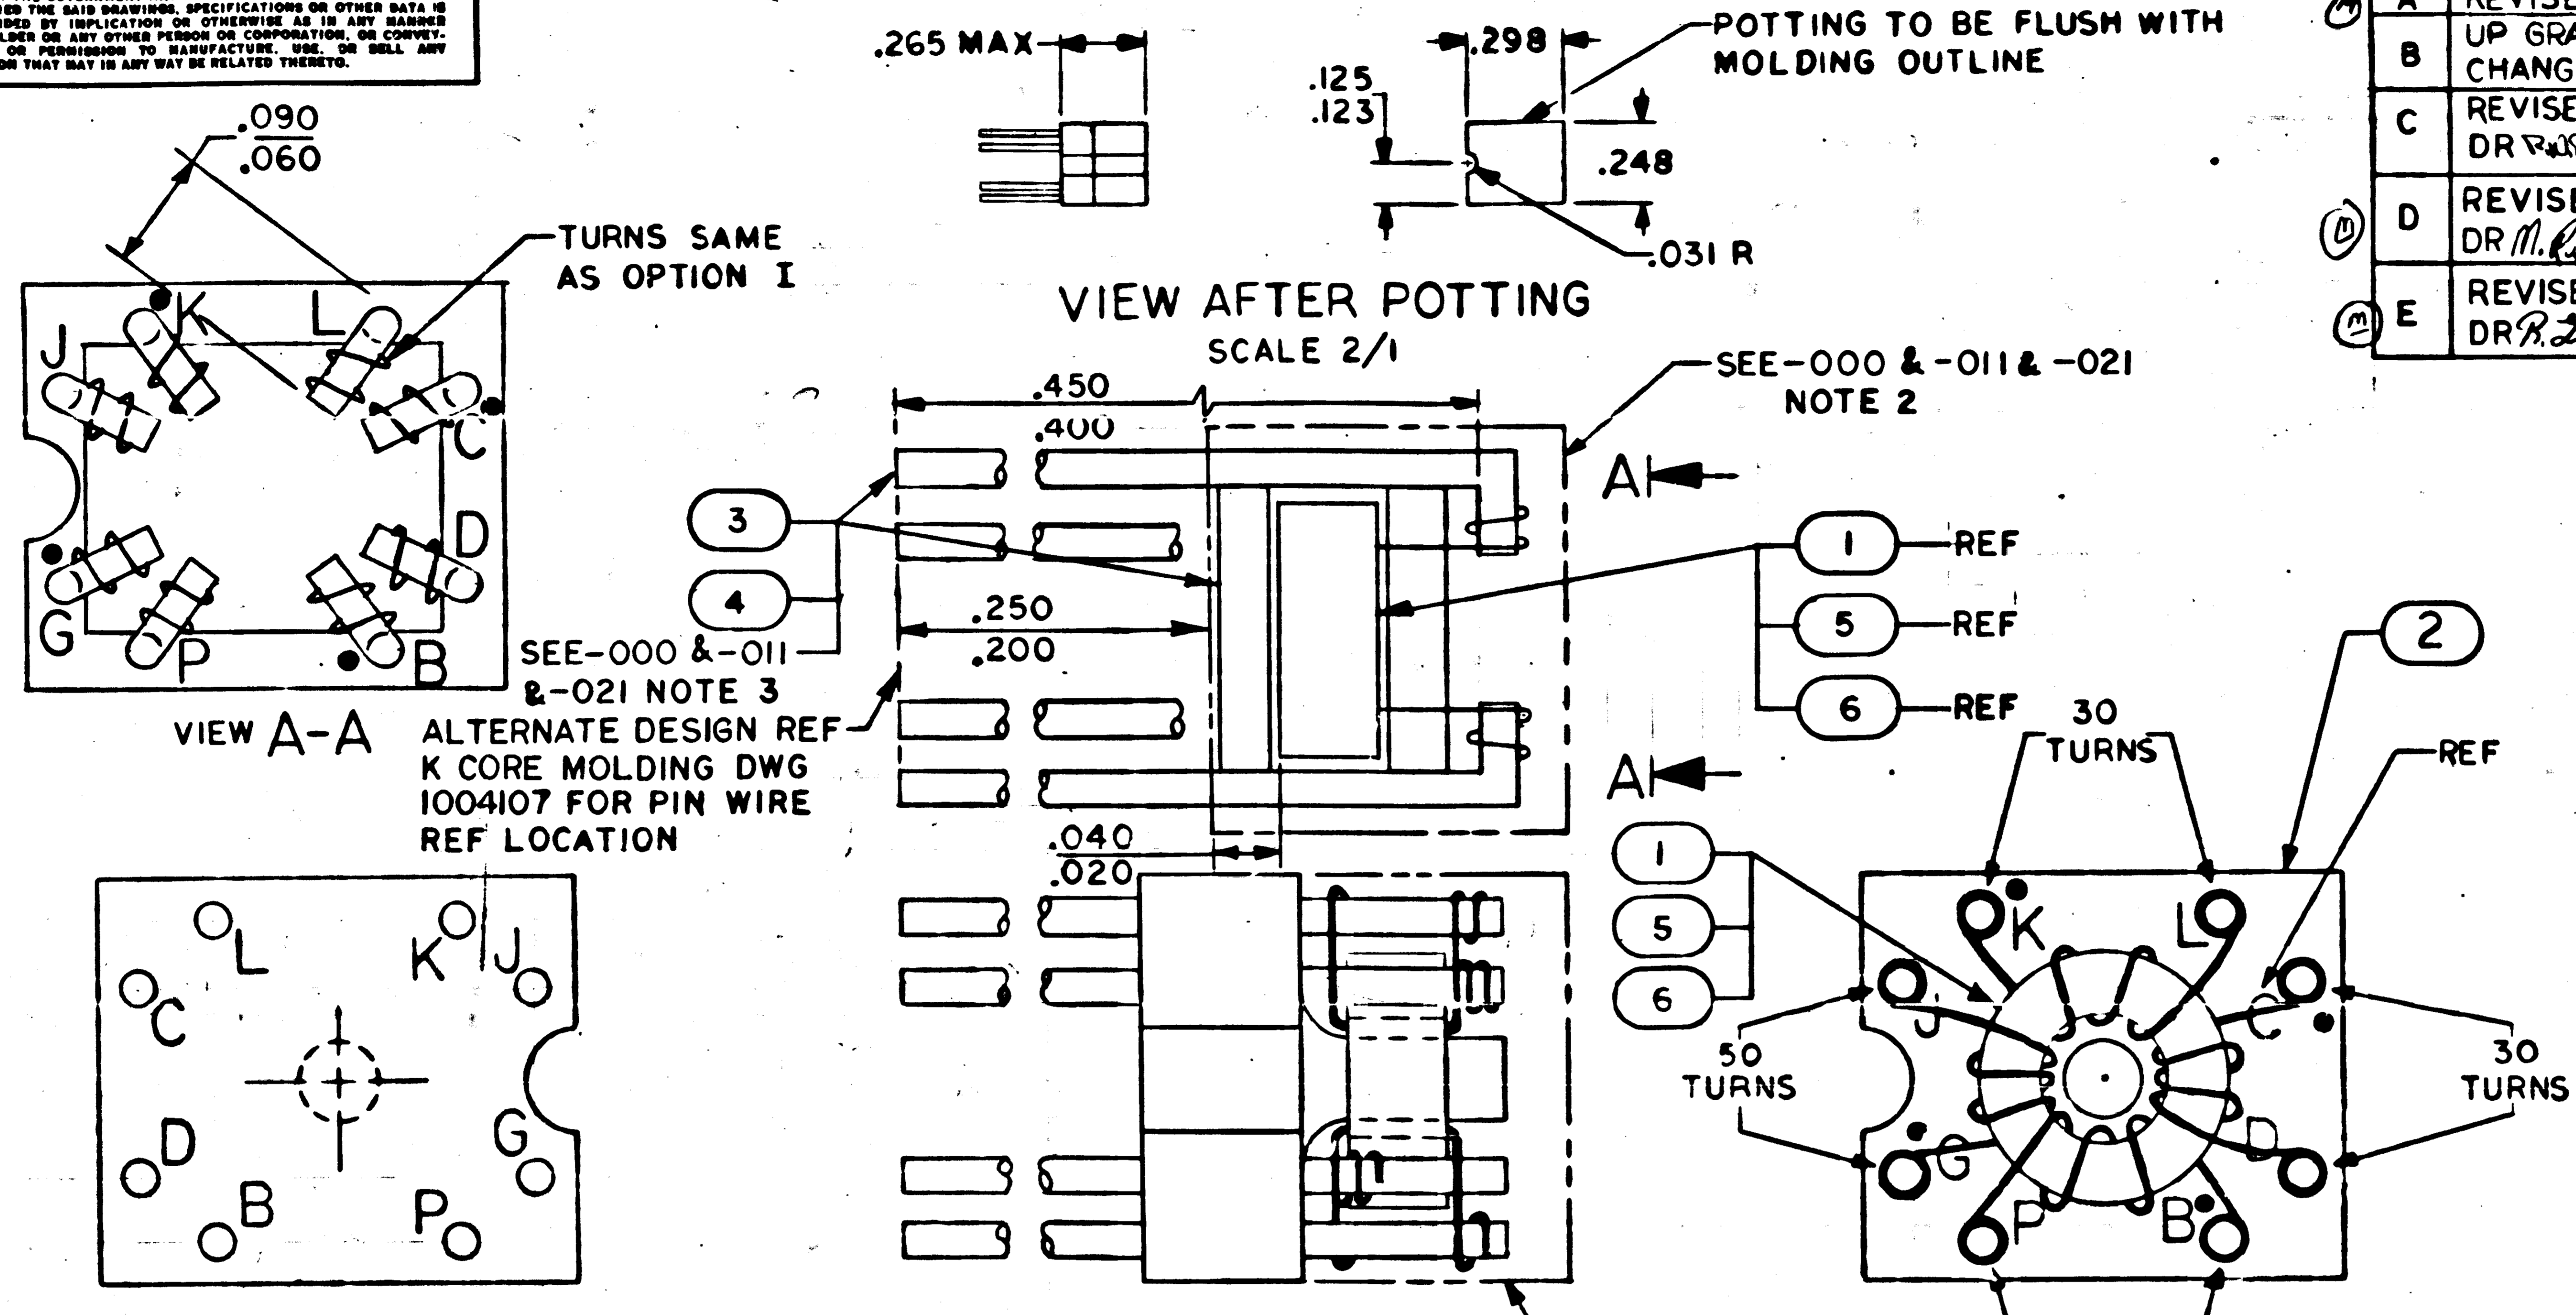

GENERAL NOTES

1. INTERPRET DRAWING IN ACCORDANCE WITH STANDARDS PRESCRIBED BY MIL-D-70327
2. IDENTIFY WITH DRAWING NO. AND REV PER ND1002019
3. THE ORIGINAL CONFIGURATION IS IDENTIFIED BY THE DRAWING NUMBER AND A-000 SUFFIX
4. AR DENOTES AS REQUIRED

-000 NOTES

1. CORE WINDINGS TO BE SOLDERED TO PINS PER MSFC-PROC-158
2. ENCAPSULATE PER ND 1002126 USING EPOXY RESIN PER 1006836
3. FIND NO. 3 & 4 TO BE USED WITH ALTERNATE DESIGN, QUANTITY OPTIONAL AS INDICATED
4. UNITS MUST MEET THE REQUIREMENTS OF PS1003084

-011 NOTES

1. CORE WINDINGS TO BE SOLDERED TO PINS PER ND1002071 USING SOLDER PER ND1002075 EXCEPT THAT WRAPS SHALL BE 3 TO 4 TURNS
2. ENCAPSULATE PER ND1002126 METHOD 1 USING EPOXY RESIN PER 1006836 WITH A MINIMUM ENCAPSULATION THICKNESS OF .005
3. FIND NO. 3 & 4 TO BE USED WITH ALTERNATE DESIGN QUANTITY OPTIONAL AS INDICATED

SEE -011 NOTE 3
-021

QTY REQD	QTY REQD	QTY REQD	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	FIND NO.
1	1	1	1004103-021	ASSEMBLY, WOUND, K CORE	6
AR	AR	AR	1004108-011	ASSEMBLY, WOUND, K CORE	5
AR	AR	AR	1006757-8	WIRE	4
AR	AR	AR	1004633	SPACER, INSULATING	3
AR	AR	AR	1004107	MOLDING, K CORE	2
1	1	1	1004108-000	ASSEMBLY, WOUND, K CORE	1

2003026		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	MIT INSTRUMENTATION LAB CAMBRIDGE, MASS.		MANNED SPACECRAFT CENTER HOUSTON, TEXAS	
1003152		TOLERANCES ON FRACTIONS DECIMALS ANGLES	DRAWN BY: <i>[Signature]</i> DATE: 6 MAR 63		ASSEMBLY K CORE	
NEXT ASSY	USED ON	± .005	CHECKED: <i>[Signature]</i> 4/24/63			
APPLICATION		DO NOT SCALE THIS DRAWING	APPROVAL: <i>[Signature]</i>		CODE IDENT NO.	SIZE
		MATERIAL: —	NASA APPROVAL: <i>[Signature]</i> 4/24/63		80230	C
		HEAT TREATMENT: —	MIT APPROVAL: <i>[Signature]</i> 4/24/63		1003084	
		FINAL FINISH: —			SCALE 10/1	WT
					SHEET 1	OF 1