

NOTICE - WHEN GOVERNMENT DRAWINGS, SPECIFICATIONS, OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE UNITED STATES GOVERNMENT THEREBY INCURS NO RESPONSIBILITY NOR ANY OBLIGATION WHATSOEVER, AND THE FACT THAT THE GOVERNMENT MAY HAVE FORWARDED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS AN AUTHORITY LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE, OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THEREBY.

1006760

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL
A	REVISED & REDRAWN PER TDRR 00288 UPGRADED TO CLASS A RELEASE	1/18/63	
B	REVISED PER TDRR 00435	2-20-63	WK
C	REVISED PER TDRR 00733	4/3/63	WK
D	CHANGE PER TDRR 02593	8/14/63	WK
E	REVISED PER TDRR 04180	10/30/63	WK
F	REVISED PER TDRR 06247	2-18-64	WK

NOTES:



1. GENERAL REQUIREMENTS:

- A. UNITS SHALL MEET THE APPLICABLE REQUIREMENTS OF MIL-R-22684 FOR TYPE RL 20 WITH THE EXCEPTIONS AND ADDITIONS SPECIFIED HEREIN.
- B. EXCEPTIONS:
- UNITS SHALL HAVE WELDABLE NICKEL LEADS PER PS 1015400. LEADS SHALL ALSO GOLD FLASHED PER PS 1015400 UNLESS OTHERWISE SPECIFIED. A CERTIFICATE OF COMPLIANCE OF LEAD MATERIAL SHALL ACCOMPANY EACH LOT SHIPPED. ENCAPSULATING MATERIAL MAY COVER LEADS ONLY TO EXTENT SHOWN.
 - INITIAL RESISTANCE SHALL BE PLUS OR MINUS 2% OF THE SPECIFIED VALUE.
 - TEMPERATURE COEFFICIENT:
± 200 P.P.M./°C MAX FROM -55°C TO 150°C.
 - UNITS SHALL BE CAPABLE OF MEETING AN END OF LIFE TOLERANCE OF ±5% OF NOMINAL VALUE SPECIFIED AFTER 5000 HOURS WHEN ENERGIZED AS SHOWN IN DESIGN APPLICATION DERATING CURVE BELOW.
 - MARKING: UNIT SHALL BE PERMANENTLY AND LEGIBLY MARKED PER MIL-STD-1002019 WITH THE MANUFACTURER'S SYMBOL, TYPE DESIGNATION, NUMERICAL RESISTANCE, VALUE AND TOLERANCE, LETTER G INDICATING ±2% RESISTANCE TOLERANCE, AND THE MANUFACTURER'S FOUR-DIGIT MANUFACTURING LOT NUMBER.

C. ADDITIONS:

- THE SUPPLIER SHALL CONFORM TO THE QUALITY ASSURANCE PROVISIONS CONTAINED IN NASA DOCUMENT ND1015404 CLASS I.
 - BURN IN: 24 HOURS AT 150% OF RATED LOAD AT ROOM AMBIENT TEMPERATURE. THE FOLLOWING PARTS SHALL NOT BE SHIPPED:
 - ANY PART WHICH CHANGES MORE THAN THE MEAN CHANGE ±2 SIGMA.
 - ANY PART WHICH CHANGES MORE THAN 0.75%.
 - ANY PART WHICH IS BEYOND PURCHASE TOLERANCE AT THE CONCLUSION OF THE TEST.
- D. INTERPRET DRAWING IN ACCORDANCE WITH STANDARDS PRESCRIBED BY MIL-D-70327.

BASIC RESISTANCE VALUE OHMS	MULTIPLIER				
	1	10	10 ²	10 ³	10 ⁴
10		8	32	56	80
11		9	33	57	81
12		10	34	58	82
13		11	35	59	83
15		12	36	60	84
16		13	37	61	85
18		14	38	62	86
20		15	39	63	87
22		16	40	64	88
24		17	41	65	89
27		18	42	66	90
30		19	43	67	91
33		20	44	68	92
36		21	45	69	93
39		22	46	70	94
43		23	47	71	95
47		24	48	72	96
51	1	25	49	73	
56	2	26	50	74	
62	3	27	51	75	
68	4	28	52	76	
75	5	29	53	77	
82	6	30	54	78	
91	7	31	55	79	

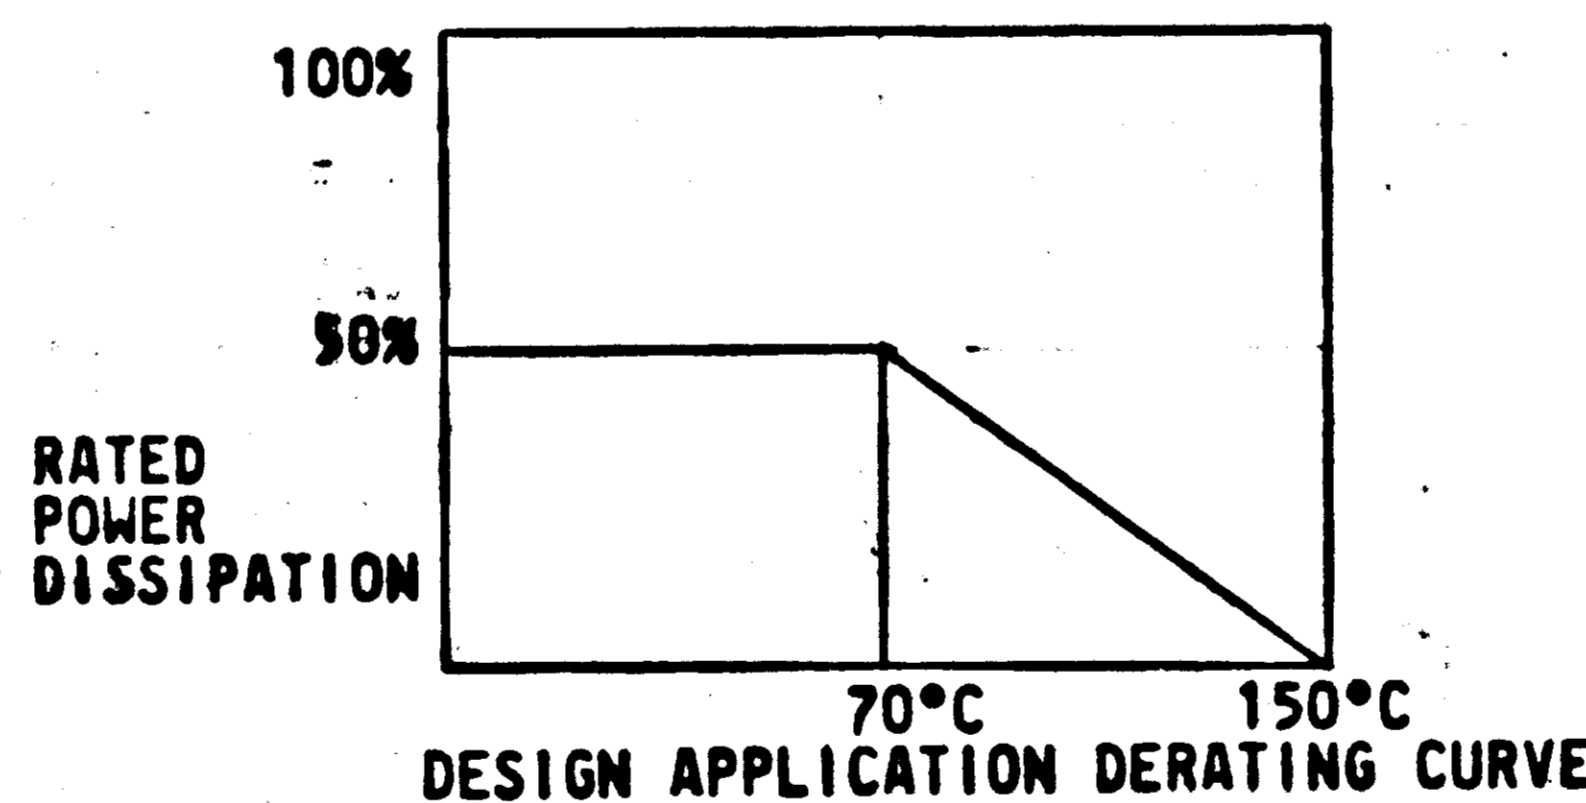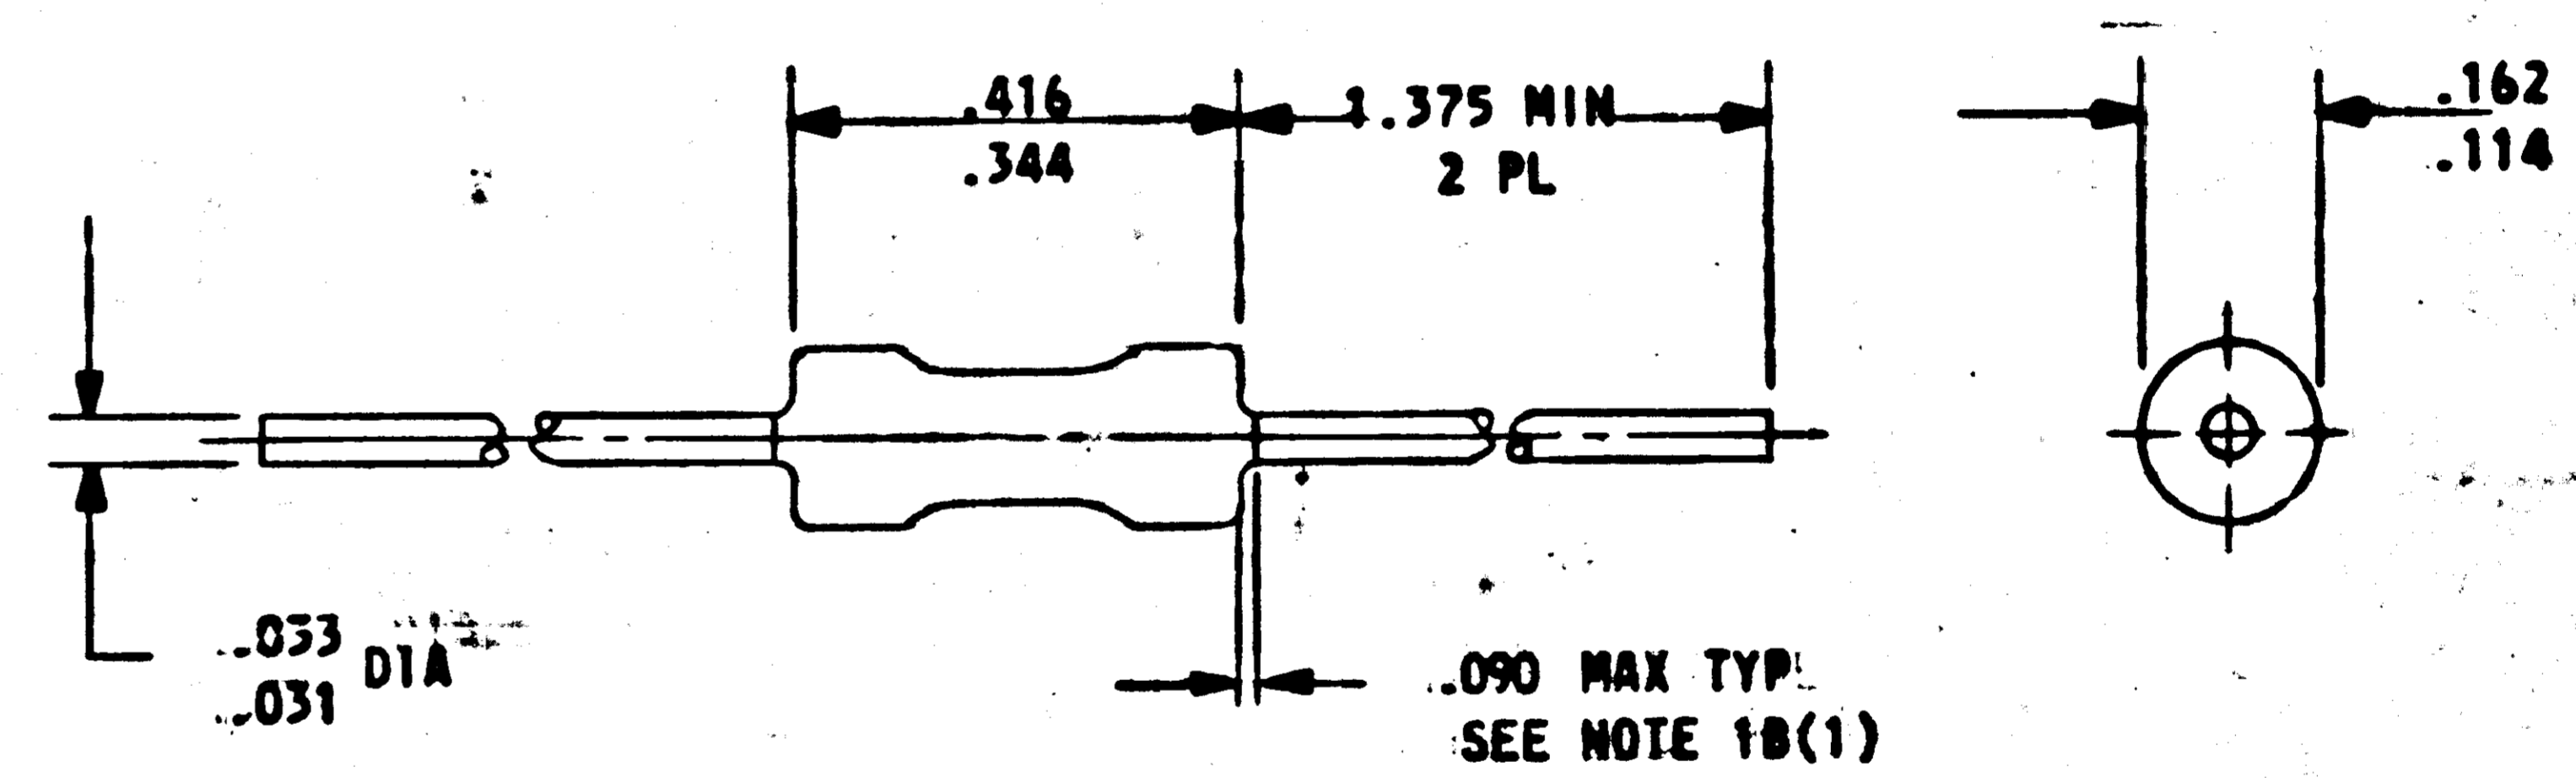

MASTER

PURCHASE TO QUALIFICATION STATUS LIST
ND1002034

MASTER

QTY REQD	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	FIND NO.
LIST OF MATERIALS			
MIT INSTRUMENTATION LAB CAMBRIDGE, MASS.		MANNED SPACECRAFT CENTER HOUSTON, TEXAS	
DRAWN <i>Madhavi</i> DATE 1-17-63 CHECKED <i>W. J. R. P.</i> DATE 1-17-63 APPROVAL <i>W. J. R. P.</i> DATE 1-18-63		RESISTORS, FIXED METAL FILM 1/2 WATT SPECIFICATION CONTROL DRAWING	
MATERIAL SEE NOTES			
HEAT TREATMENT NONE		CODE IDENT NO.	NASA DRAWING NO.
FINAL FINISH NONE		SIZE C	1006760
NEXT ASSY	USED ON	SCALE 4/1	WT
APPLICATION		SHEET	OF 1

