

APOLLO

GUIDANCE AND NAVIGATION

Approved: Milton B. Trageser Date: 6/18/64
Milton B. Trageser, Director
Apollo Guidance and Navigation Program

Approved: Roger B. Woodbury Date: 6/22/64
Roger B. Woodbury, Deputy Director
Instrumentation Laboratory

E-1560

A MANUAL LEM BACK-UP
GUIDANCE SYSTEM

by

Malcolm W. Johnston
April 1964

**INSTRUMENTATION
LABORATORY**

CAMBRIDGE 39, MASSACHUSETTS

COPY # 1

ACKNOWLEDGMENT

Many of the design features of the guidance system presented herein were contributed by other members of the MIT Instrumentation Laboratory Staff. Especially helpful were the contributions of John M. Dahlen, Robert L. White, and Milton B. Trageser.

This report was prepared under DSR Project 55-191, sponsored by the Manned Spacecraft Center of the National Aeronautics and Space Administration through Contract NAS 9 - 153.

The publication of this report does not constitute approval by the National Aeronautics and Space Administration of the findings or the conclusions contained therein. It is published only for the exchange and stimulation of ideas.

E-1560

A MANUAL LEM BACK-UP GUIDANCE SYSTEM

ABSTRACT

This report outlines a manual back-up guidance system for LEM abort to rendezvous from any point in the powered descent or ascent phase, from subsequent transfer and rendezvous phases, or from the lunar surface.

Powered ascent maneuvers are implemented with reference to on-board steering displays. Subsequent transfer and rendezvous maneuvers require steering data obtained through use of the tracking radar and primary G&N system on the CSM.

A clear pericyynthion is not obtained until after the transfer maneuver. Relinquishing the requirement for an initially clear pericynthion allows implementation of a more efficient ascent profile, thus permitting low accuracy systems to live within the LEM characteristic velocity budget.

by Malcolm W. Johnston

April 1964

TABLE OF CONTENTS

| | <u>Page</u> |
|------------------------------|-------------|
| Introduction | 7 |
| System Description | 9 |
| Timing Display | 9 |
| Attitude Reference | 11 |
| System Performance | 14 |
| Conclusion. | 16 |
| References | 28 |

LIST OF ILLUSTRATIONS

| <u>Figure</u> | <u>Title</u> | <u>Page</u> |
|---------------|--|-------------|
| 1 | System Display | 17 |
| 2 | System Display | 18 |
| 3 | Steering Parameter Time Relationships . . . | 19 |
| 4 | Operational Envelope - Abort From Hover - Transfer Velocity Correction Occurs 10 Min. After Cutoff | 20 |
| 5 | Operational Envelope - Abort From Hover - Transfer Velocity Correction Occurs 20 Min. After Cutoff | 21 |
| 6 | Operational Envelope - Abort From Hover - Transfer Velocity Correction Occurs 20 Min. After Cutoff | 22 |
| 7 | Operational Envelope - Abort From Hover - Transfer Velocity Correction Occurs 30 Min. After Cutoff | 23 |

INTRODUCTION

A manual back-up guidance system for the LEM is outlined. Its function is to provide guidance for a LEM abort from any point in the powered descent or ascent phase, from subsequent transfer and rendezvous phases, or from the lunar surface in the event of primary LEM G&N failure. Such abort involves initial powered ascent to non-clear pericyynthion cut-off conditions, transfer (including midcourse corrections) on a clear pericynthion trajectory to LEM/CSM intersection within the first orbit, and rendezvous, canceling relative vehicle motion.

The suggested system offers simplicity, light weight, high reliability, identical procedure regardless of time of abort, complete independence from the LEM primary G&N system, and low development risks. The latter may be important in light of relatively tight development schedules. The low system accuracy accompanying the above advantages results in large position and velocity uncertainties at ascent cut-off. Uncertainties in altitude rate (flight path angle) and total velocity are most critical and require adherence to the following ground rules:

The nominal flight path angle at ascent cut-off must be biased outward, assuring that the non-clear pericynthion is well ahead of the LEM.

Aborts occurring while the LEM and CSM can maintain line-of-sight contact will depend on tracking by the CSM after ascent cut-off for velocity correction information to obtain a clear pericynthion. The same correction will place the LEM on the proper trajectory for transfer to the CSM orbit. Rendezvous will subsequently be com-

pleted with the aid of tracking by the CSM.

For aborts when CSM tracking is not immediately available, a clear pericyynthion will be guaranteed by applying a predetermined velocity correction soon after ascent cut-off. Transfer and rendezvous will subsequently be completed with the aid of tracking by the CSM.

The nominal ascent cut-off velocity may safely be sub-orbital because of the positive flight path angle at cut-off and the required subsequent velocity correction.

SYSTEM DESCRIPTION

Powered ascent is accomplished by thrusting at two predetermined inertially fixed angles. The same two angles are always used regardless of the time of abort. The only variable steering parameters are the time at which the vehicle is reoriented to the second thrust vector angle and time of engine cut-off. A Timing Display indicates these two variable "reference times" along with the clock time from initiation of powered descent. The remainder of the system consists of an Attitude Reference to obtain proper thrust vector angles.

Transfer and Rendezvous maneuvers rely on steering parameters obtained from the CSM (Reference I). These velocity corrections would be implemented by the clock and attitude reference mentioned above.

Timing Displays

A description of the operation of the Timing Display illustrates the abort procedure. At the beginning of the powered descent phase the "Time From Event" digital display is started (Fig. 1). Adjacent to this clock and driven directly by its shaft are two sets of mechanical counter time displays representing two sets of variable reference times. The first set would be utilized if both the descent and ascent stages were operable, while the second set would be referred to if it were necessary to abort with only the ascent stage (the latter would be necessary during descent if the descent stage failed or during ascent). Each set has its own associated thrust vector angles. When an abort signal is received, the "Time From Event" clock continues to operate while the rest of the display is disengaged, thus fixing the two sets of reference times. The astronaut's first actions would be to refer to the proper display

set, and to orient the vehicle to the first of the two predetermined thrust vector angles. This angle is maintained until the first reference time is read on the "Time From Event" clock. The vehicle is then reoriented to the second thrust vector angle, which is maintained until cut-off at the second reference time. Aborts occurring within a few seconds of initiation of powered descent would require only the transfer and rendezvous phases. Further down the powered descent trajectory a short period exists where aborts would utilize only the first thrust vector angle during the ascent phase. Figure 3 illustrates these early abort situations.

Design of the Timing Display requires that two acceptable thrust vector angles be determined along with the relationships governing the variable reference times. Such an analysis was performed for the case where only the ascent stage is operable. A particular position and velocity vector must be obtained at ascent cut-off. The planar case was considered and range was relinquished as a constraint at cut-off. Three constraints remained; altitude, tangential velocity, and radial velocity. Four degrees of freedom are available to satisfy these constraints (two thrust vector angles and two reference times), suggesting a family of possible solutions. A family of solutions was obtained for the fuel-critical abort from hover case. The solution requiring least fuel provided a specification of the two constant thrust vector angles. Having fixed these two degrees of freedom, only the two reference times remain as variables for obtaining satisfactory ascent cut-off conditions for aborts from earlier portions of the descent phase or from the ensuing ascent phase. One of the three end condition constraints, altitude, was then relinquished in order to allow solution of the problem. Fortunately, the resultant altitude variations, as a function of time of abort, were not excessive. Steering, therefore, involves controlling the cut-off velocity vector by the two reference times. These times were found to be piecewise linear with time from initiation of powered descent (Fig. 3). The intersection of the

two linear portions occurs at the time in the descent phase that vehicle reorientation and engine throttling are required, suggesting that these actions caused the linear interruption. A third linear portion is expected to be necessary for aborts during nominal ascent, though the analysis was not extended to this region.

The above has yielded the relationships necessary for design of one set of mechanical counters on the Timing Display. A similar analysis for the case where both ascent and descent stages are operable will yield the design information for the second set. The digital computer program written for the above analysis can be utilized for the remaining analyses.

A more accurate scheme, requiring the addition of an integrating accelerometer along the thrust axis, would utilize the accelerometer outputs rather than time in this display. (System #2, Table IV).

Attitude Reference

A variety of attitude references could be utilized with the above Timing Display. The simplicity and expected light weight of the Timing Display suggest that overall system weight and simplicity will depend on the choice of the attitude reference. Therefore, a crude two degree of freedom gyro with the spin axis aligned near the nominal ascent cut-off velocity vector was selected. Investigation of commercial availability indicates that a limited development program could provide an instrument with the following characteristics:

- 1) Less than 10° /hour equivalent total drift rate
- 2) Less than 5 pounds total weight
- 3) 360° outer gimbal, $\pm 80^{\circ}$ inner gimbal freedom
- 4) Direct mechanical display of outer and inner gimbal angle, though indirect displays may be more convenient.
- 5) High reliability figures quoted by industry require further investigation.

(References having accuracies greater than 3° to 4° /hr equivalent total drift rate deserve an automatic steering loop rather than the manual technique described above. With such a loop, and the more accurate attitude reference, the simplified steering law suggested above could provide a clear pericyynthion.)

Lack of spin axis attitude, though least important, requires some additional reference. This could be a simple reticule on the windows for alignment with the lunar horizon ("wings level"). The instrument could be initially aligned prior to powered descent with respect to the spacecraft. Subsequent re-alignments for transfer and rendezvous maneuvers would rely on celestial references, perhaps utilizing the Optical Alignment Telescope (OAT) and/or window reticules. A quick caging and re-alignment might be necessary if the primary and back-up references reached gimbal lock simultaneously. This can happen early in powered descent, though sufficient fuel is available at that time to compensate for the inaccurate ascent cut-off that might result. At hover the possibility of the two systems gimbal locking simultaneously is remote.

A more complicated "all attitude" scheme could employ two of these gyros. The spin axes of each would be offset sufficiently to reduce the possibility of both reaching gimbal lock simultaneously. In addition, this dual gyro arrangement could, with proper resolution, provide three degrees of attitude indication. Moreover, the LEM would have available three independent attitude references allowing majority voting for system monitoring.

A less accurate reference might be a simple annular reticule pattern scribed on the LEM window. The reticule could be utilized as follows: two or more stars, located within a few degrees of the pole of the descent/ascent plane, would be pre-selected as references. Maintenance of the correct stars in their respective annuli constrains the vehicle to pitch motion in the proper plane. Further positioning of the stars along the circumference of their respective annuli provides pitch attitude. These

reference stars could be located during unpowered descent from the CSM orbit. During powered descent the stars could be more easily detected in that they should appear within their proper annuli if descent is correct. Moreover, their position along the annuli should properly vary with time. This suggests that the annular reticule pattern might also serve as a simple visual system monitor. Regardless of the attitude reference selected, it could be utilized in the same way for systems monitoring. Both the attitude (pitch) and time at which the vehicle is nominally supposed to be at that attitude could be keyed together on the same display. Monitoring simply involves glancing at the "Time From Event" clock and the "keyed" time indication simultaneously. They should agree (Fig. 2).

SYSTEM PERFORMANCE

Tables I and II summarize the system uncertainties at ascent cut-off for an abort after sixty seconds of hovering and an abort from the surface. The large uncertainty in flight path angle at ascent cut-off precludes the possibility of obtaining a clear pericyynthion without a subsequent velocity correction. (For an abort from hover Table I indicates an altitude rate uncertainty of 183 ft/sec, corresponding to a flight path angle uncertainty of two degrees.) The nominal flight path angle at ascent cut-off must be biased outward, assuring that the non-clear pericyynthion is well ahead of the LEM. Fortunately, for an abort from hover where rendezvous within one orbit is desired, an ascent profile with a positive flight path angle at cut-off is more efficient than the corresponding clear pericynthion profile. It "lofts" the vehicle to an apolune where the transfer velocity correction can be more efficiently applied, and allows the nominal ascent cut-off velocity to be sub-orbital. The increased efficiency of this flight profile permits this low accuracy system to live within the LEM characteristic velocity budget. (See Figs. 4 through 7).

The requirement for a velocity correction subsequent to ascent cut-off to obtain a clear pericynthion imposes certain operational restrictions. Figures 4 through 7 summarize these considerations for cases where the velocity corrections (transfer maneuver) take place ten, twenty, and thirty minutes after ascent cut-off. Ten minutes is a lower limit because of the requirement for smoothing the CSM tracking radar data, while time intervals greater than thirty minutes require more accurate ascent cut-off control and/or more characteristic velocity. (A clear pericynthion represents the upper limit.)

Table III delineates the envelope of ascent cut-off conditions selected for study and indicates the "worst case" situations for two suggested systems. System acceptability is gaged on ability to live within the LEM characteristic velocity budget for these "worst case" conditions. A breakdown of the characteristic velocity required by each system is given on Table IV. In all cases characteristic velocity figures reflect correction for 2° out of plane error at ascent cut-off. Both systems utilize an attitude reference having a drift rate of 10 deg/hr. System #1 steers on the basis of the two reference times previously described, while System #2 replaces time with integrated thrust acceleration.

CONCLUSIONS

The study results indicate that a simple manual abort guidance system could provide LEM back-up capability within the present LEM fuel budget. Its light weight and low development risk are particularly attractive and suggest that it might serve as a third tier back-up system.

Relinquishing the requirement for an initially clear pericyynthion allows implementation of a more efficient ascent profile, thus permitting this low accuracy system to live within the LEM characteristic velocity budget.

The study also indicates that the steering law suggested could be utilized along with a more accurate attitude reference and automatic steering loop to obtain a clear pericyynthion.

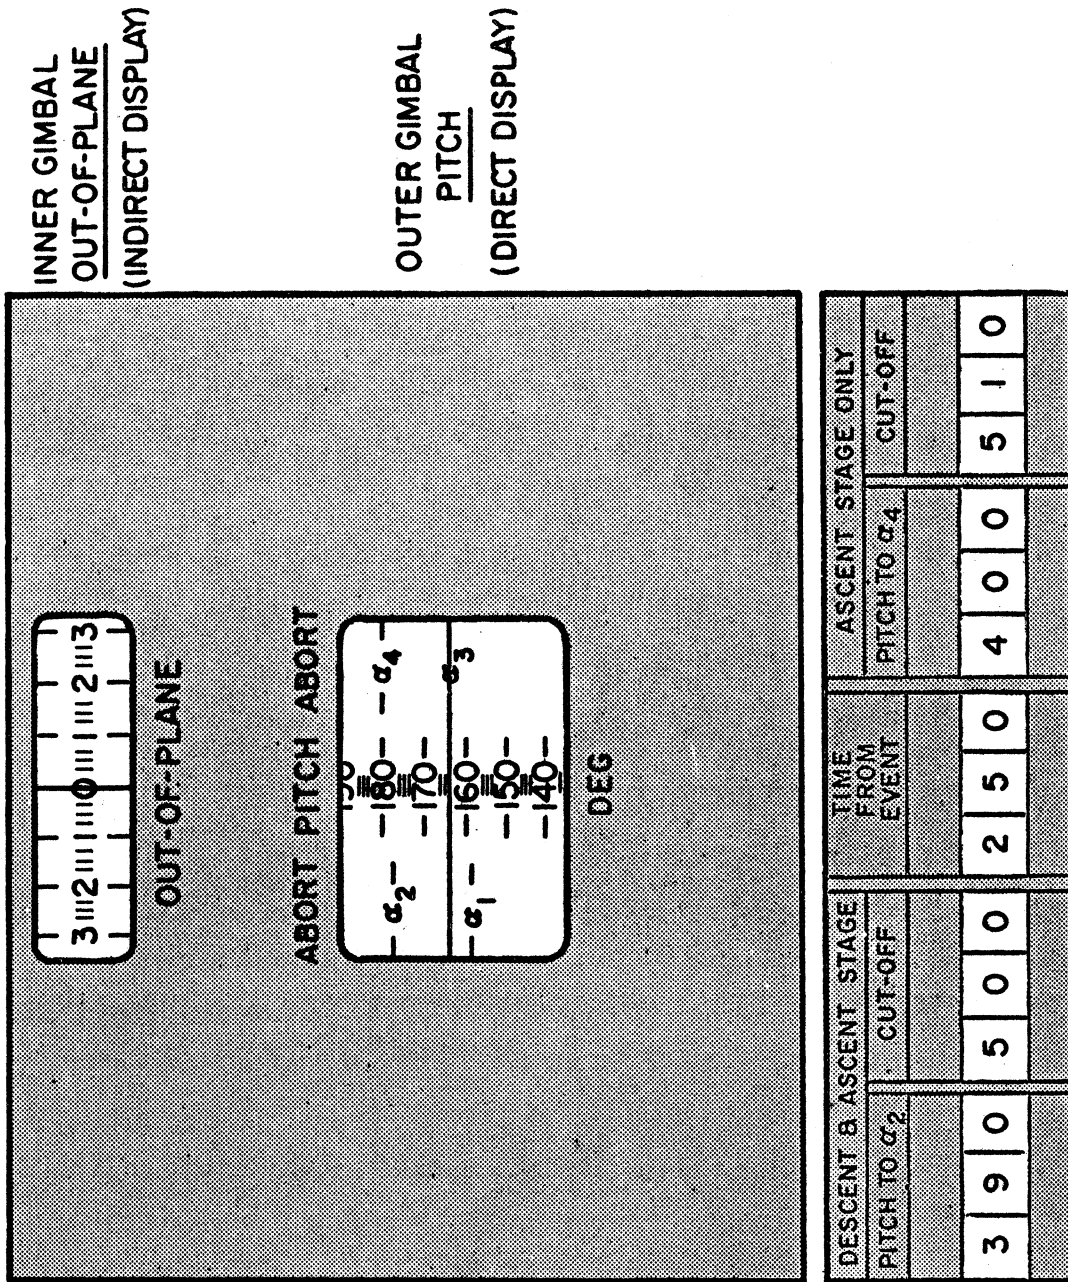


Fig. 1 System display.

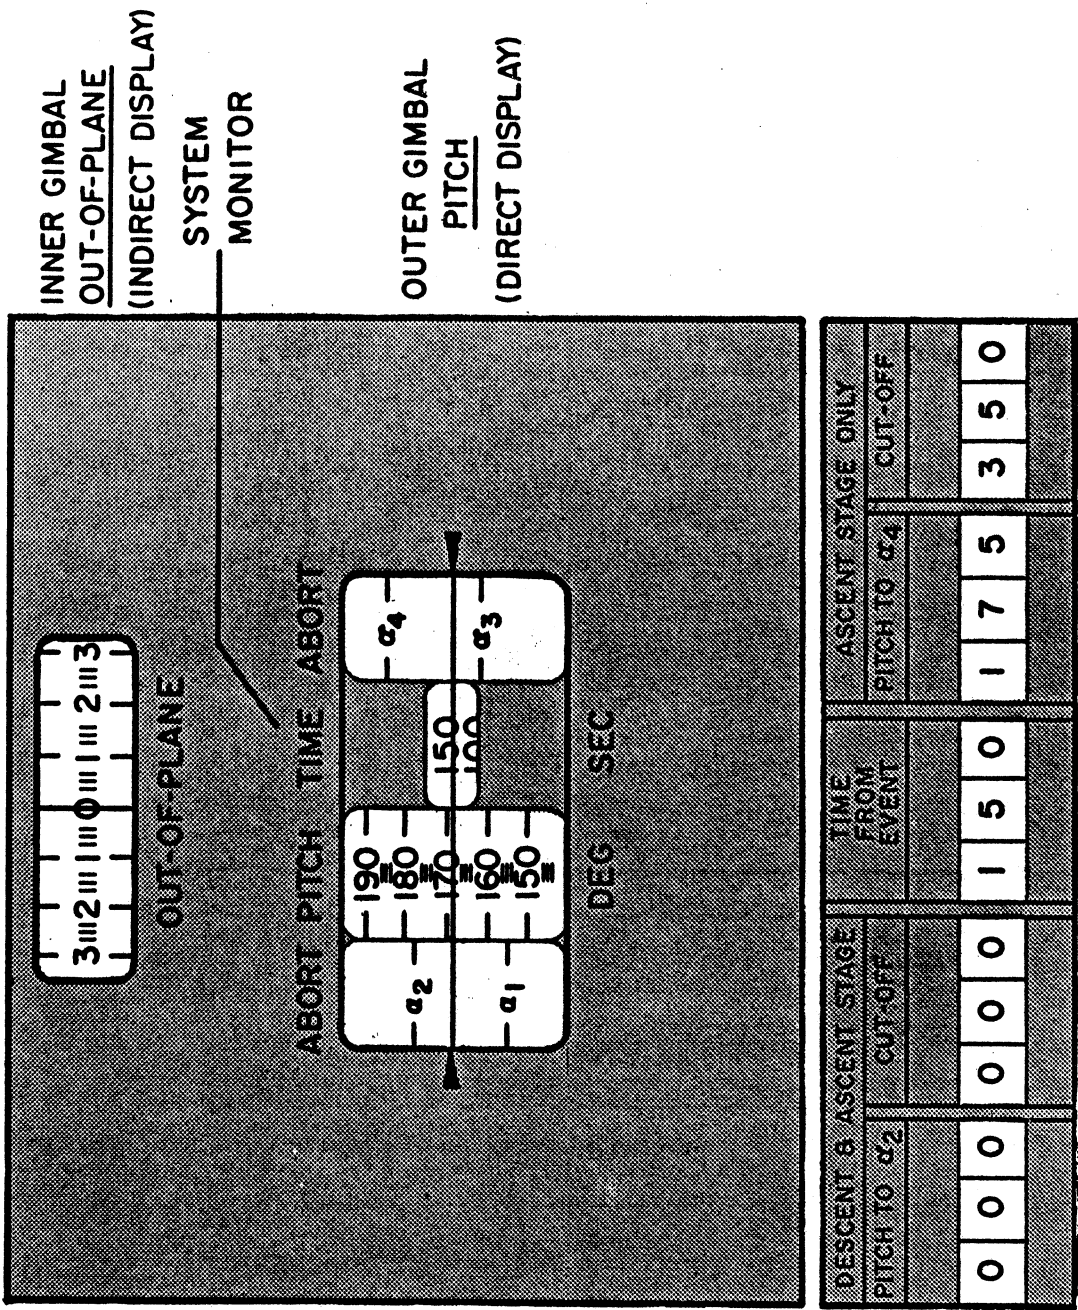


Fig. 2 System display.

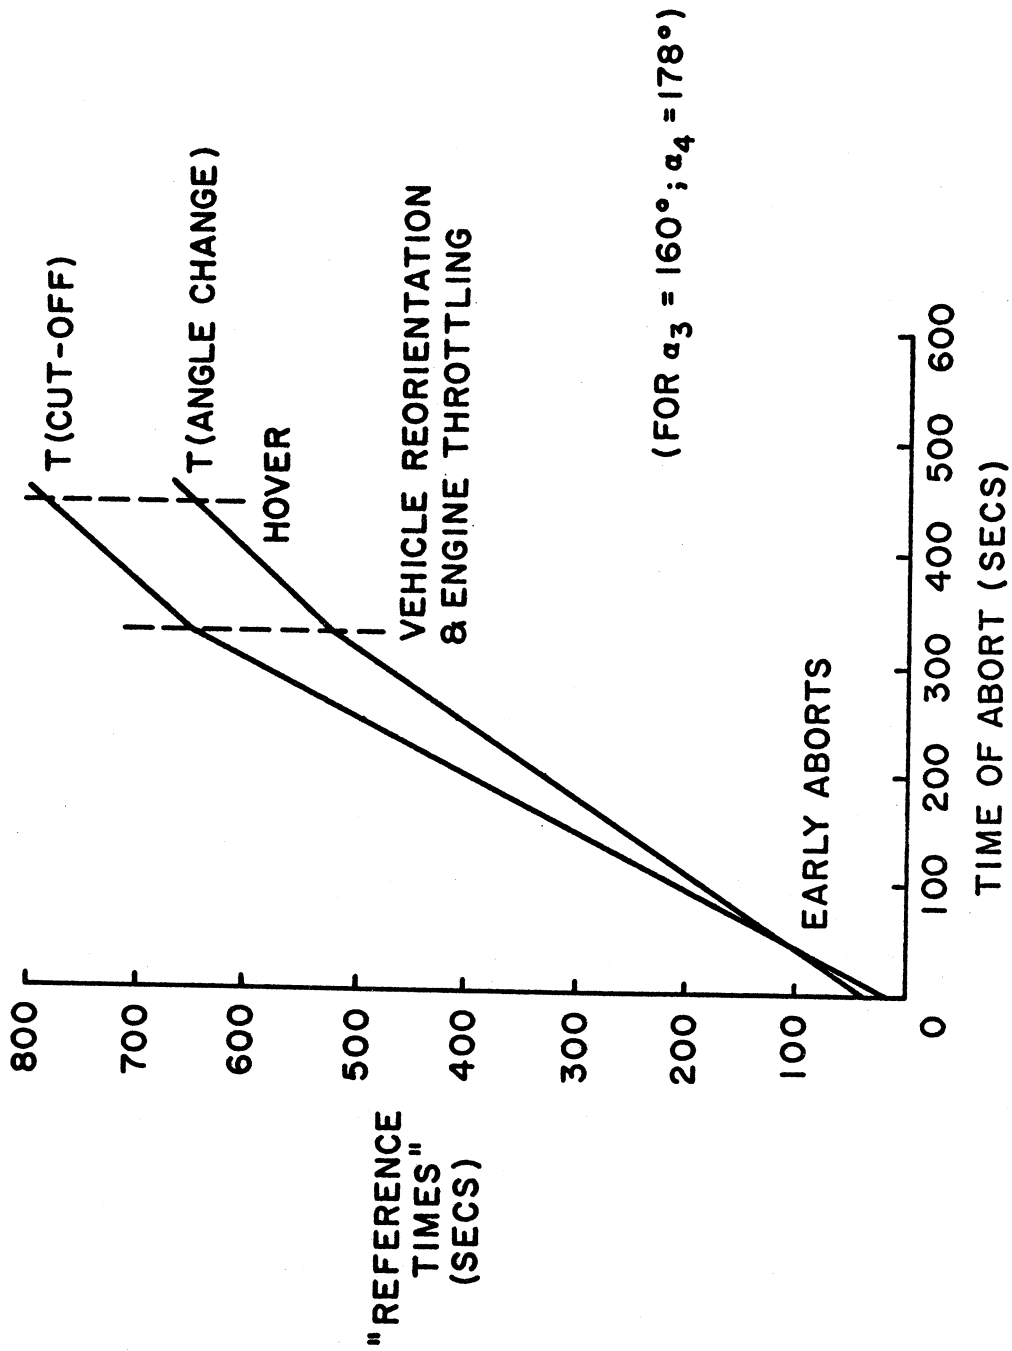


Fig. 3 Steering parameter time relationships.

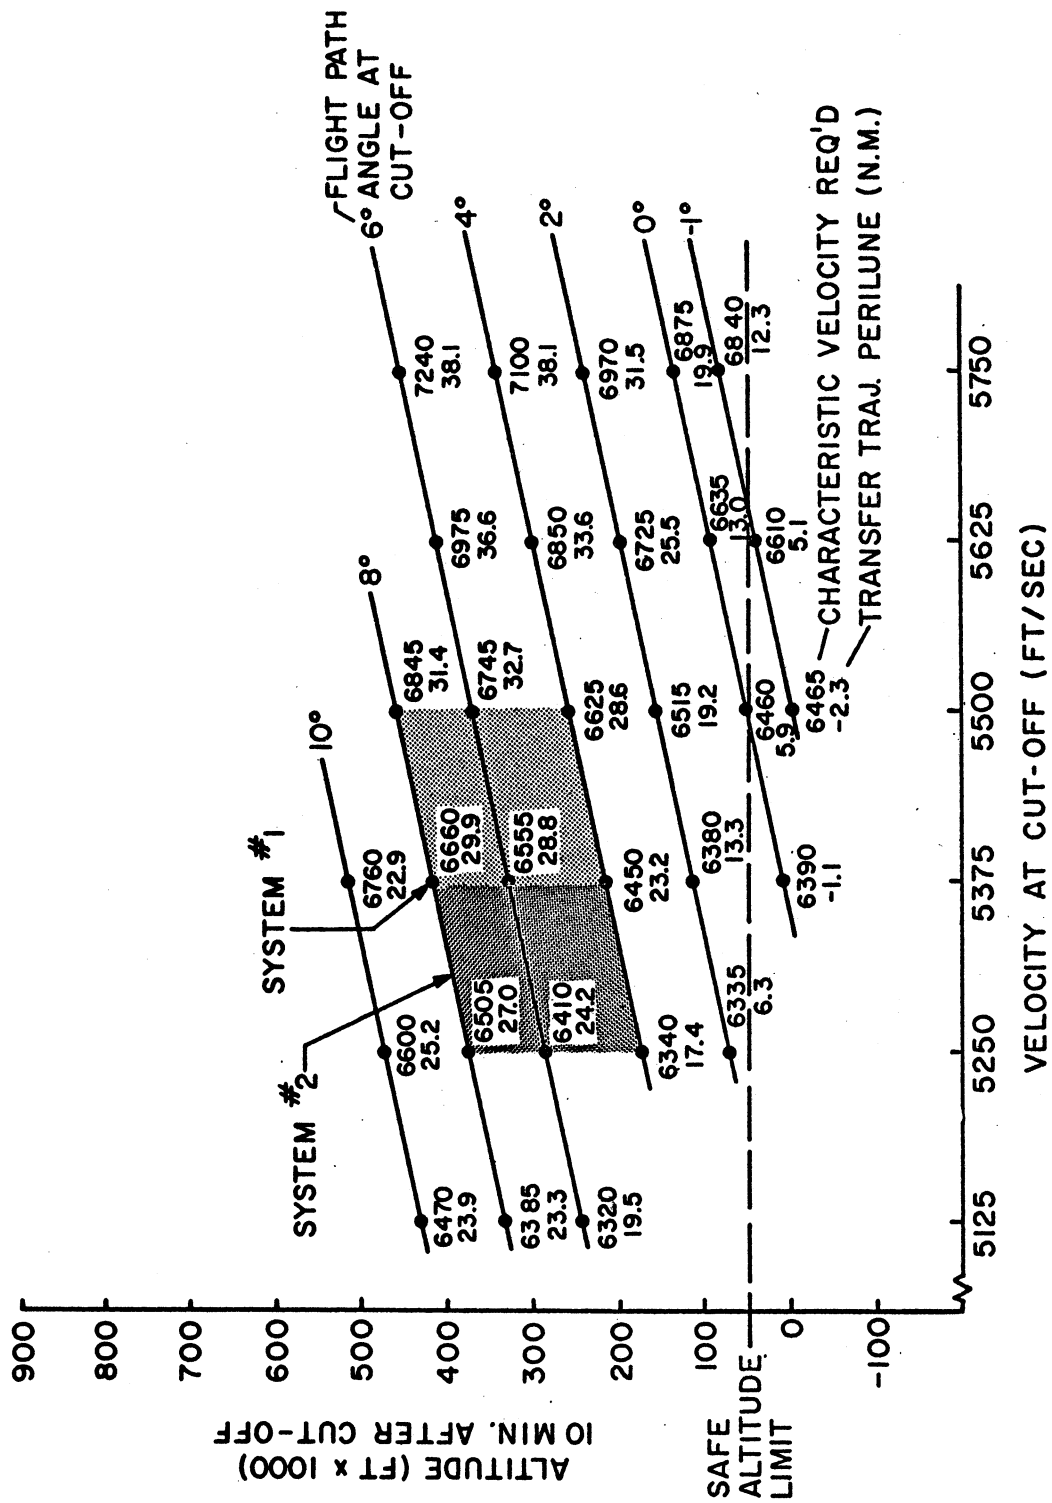


Fig. 4 Operational envelope-abort from hover-transfer velocity correction occurs 10 min after cutoff.

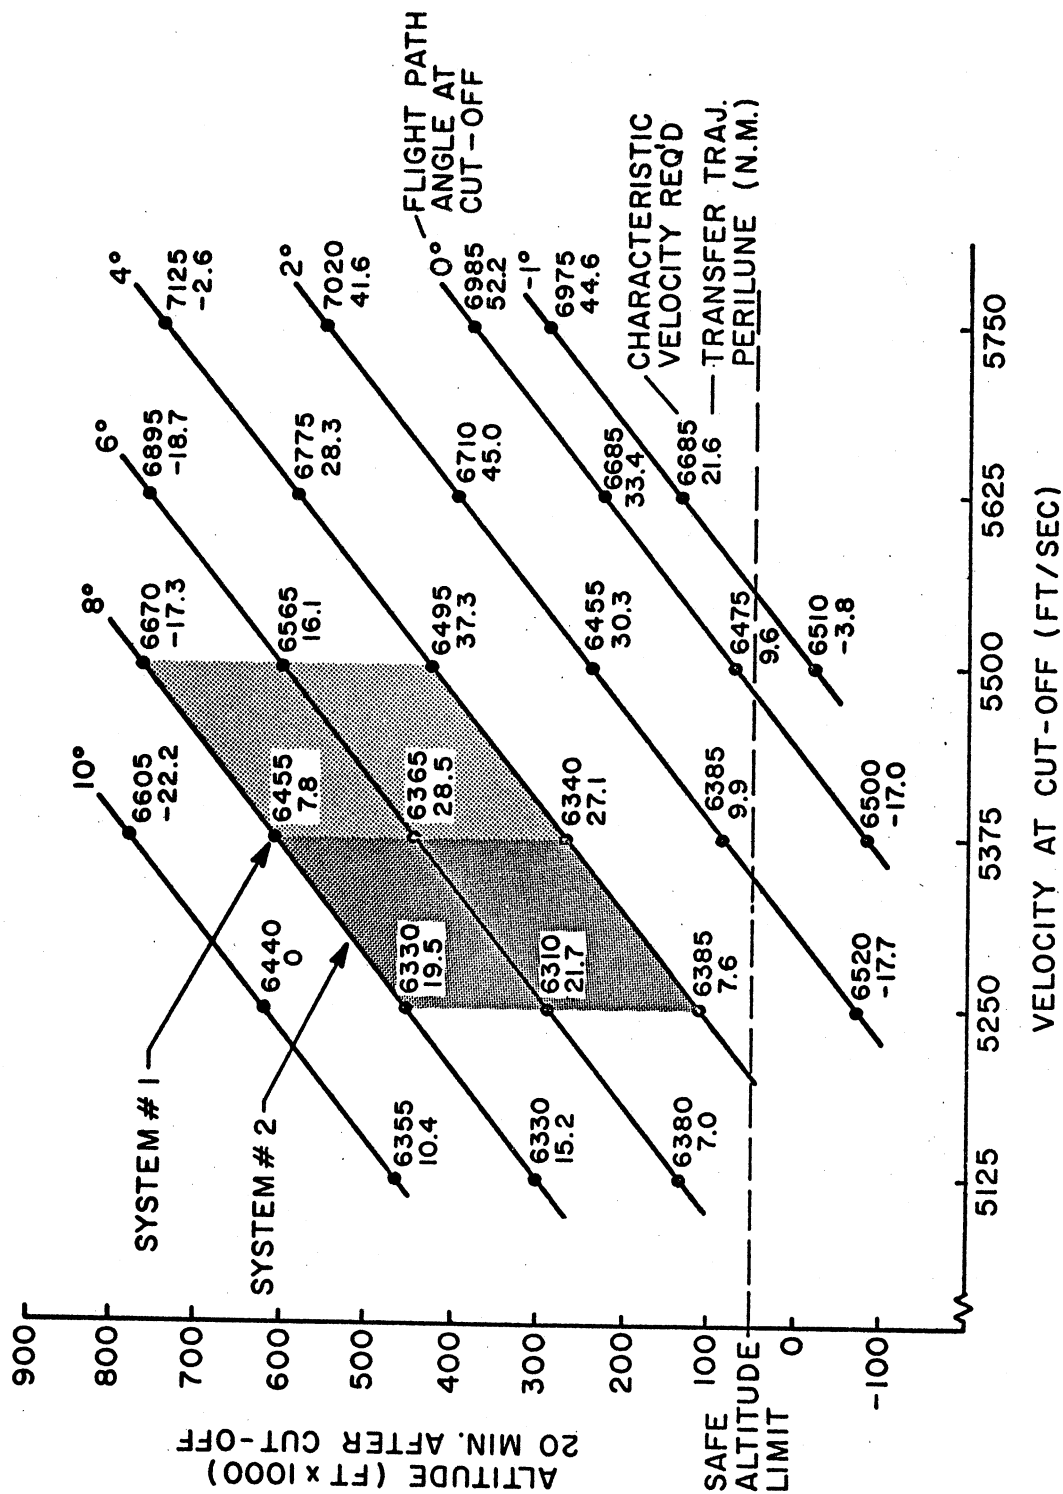


Fig. 5 Operational envelope-abort from hover-transfer velocity correction occurs 20 min after cutoff.

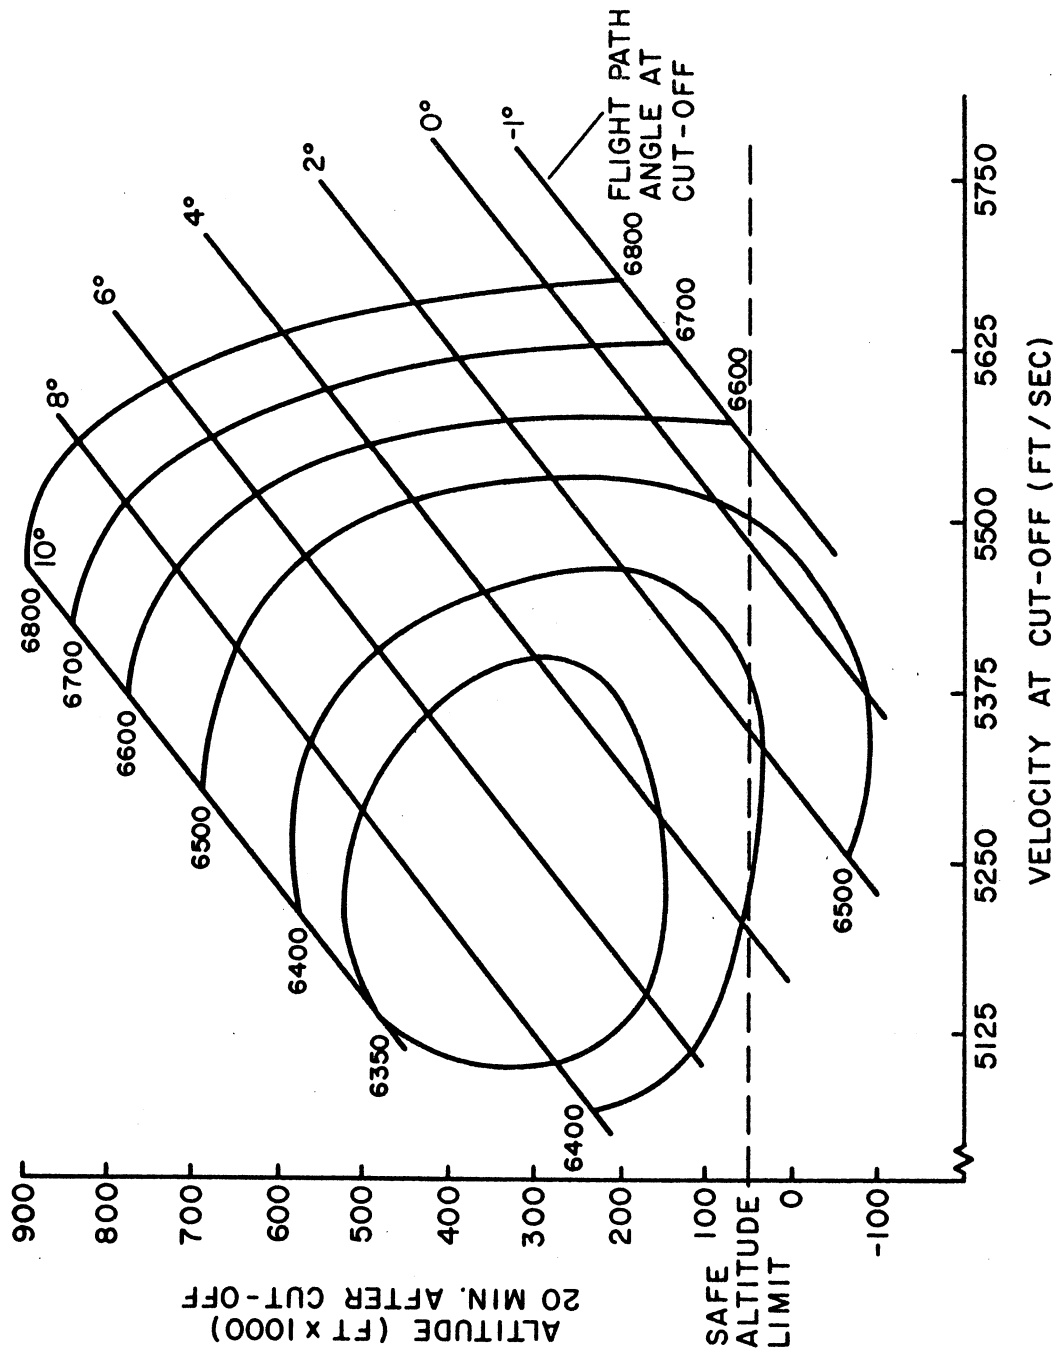


Fig. 6 Operational envelope-abort from hover-transfer velocity correction occurs 20 min after cutoff.

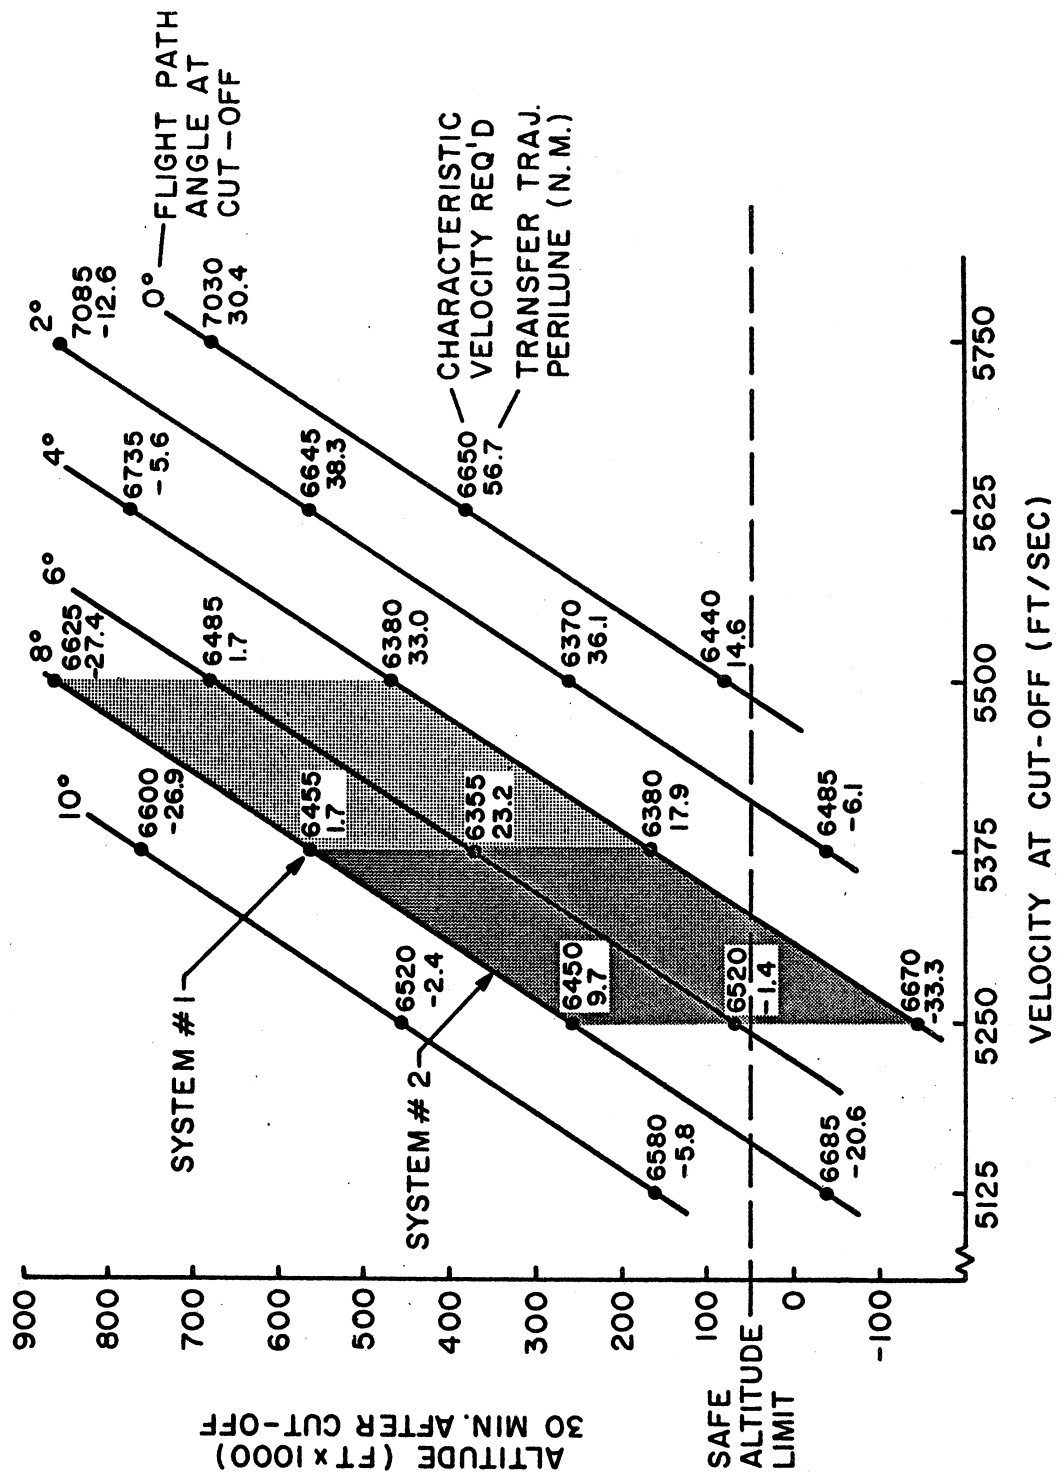


Fig. 7 Operational envelope-abort from hover-transfer velocity correction occurs 30 min after cutoff.

TABLE I
 ABORT FROM HOVER
 Uncertainties* at Cut-off

| Perturbations | H (altitude) | \dot{H} | R (range) | \dot{R} | T (track) | \dot{T} |
|----------------------------|--------------|-----------|-----------|-----------|-----------|-----------|
| <u>Initial Conditions:</u> | | | | | | |
| H (5000 ft) | 5525 | 3 | 800 | 1 | 0 | 0 |
| \dot{H} (50 ft/sec) | 18000 | 53 | 2600 | 8 | 0 | 0 |
| R (5000 ft) | 700 | 5 | 4650 | 2 | 0 | 0 |
| \dot{R} (25 ft/sec) | 1275 | 12 | 8450 | 23 | 0 | 0 |
| T (5000 ft) | 0 | 0 | 0 | 0 | 4800 | 2 |
| \dot{T} (50 ft/sec) | 0 | 0 | 0 | 0 | 17000 | 48 |
| RSS | 18885 | 55 | 10021 | 25 | 17665 | 48 |
| <u>Alignment:</u> | | | | | | |
| Outer Gimbal (Pitch) | | | | | | |
| 1st angle (1.5°) | (15000) | (60) | (7700) | (30) | (0) | (0) |
| 2nd angle (2°) | (7500) | (104) | (2400) | (25) | (0) | (0) |
| Arithmetic Subtotal | 22500 | 164 | 10100 | 55 | 0 | 0 |
| Inner Gimbal (1.75°) | | | | | | |
| Spin Axis (2°) | 0 | 0 | 0 | 0 | 23420 | 165 |
| RSS | 0 | 0 | 0 | 0 | 17500 | 92 |
| RSS | 22500 | 164 | 10100 | 55 | 29236 | 189 |
| <u>Operational:</u> | | | | | | |
| Pitch Rate (+5°/sec) | 3500 | 5 | 8000 | 13 | 0 | 0 |
| Angle Change (1 sec) | 300 | 5 | 275 | 2 | 0 | 0 |
| Cut-off timing (1 sec) | 250 | 4 | 550 | 23 | 0 | 0 |
| RSS | 3880 | 8 | 9712 | 27 | 0 | 0 |
| <u>State Variables:</u> | | | | | | |
| Thrust (1%) | 5100 | 37 | 9700 | 75 | 0 | 0 |
| Mass (1%) | 5100 | 37 | 9700 | 75 | 0 | 0 |
| ISP (1%) | 730 | 8 | 2000 | 22 | 0 | 0 |
| RSS | 7250 | 53 | 13863 | 108 | 0 | 0 |
| RSS(Total) | 30555 | 183 | 22557 | 127 | 34158 | 195 |

*3 σ values resulting from utilizing the ascent stage only and the crudest abort guidance system presently envisioned.

TABLE II
ABORT FROM SURFACE
Uncertainties* at Cut-off

| Perturbations | H (altitude) | \dot{H} | R (range) | \dot{R} | T (track) | \dot{T} |
|----------------------------|--------------|-----------|-----------|-----------|-----------|-----------|
| <u>Initial Conditions:</u> | | | | | | |
| H (5000 ft) | 5525 | 3 | 800 | 1 | 0 | 0 |
| \dot{H} (0 ft/sec) | 0 | 0 | 0 | 0 | 0 | 0 |
| R (5000 ft) | 700 | 5 | 4650 | 2 | 0 | 0 |
| \dot{R} (0 ft/sec) | 0 | 0 | 0 | 0 | 0 | 0 |
| T (5000 ft) | 0 | 0 | 0 | 0 | 4800 | 2 |
| \dot{T} (0 ft/sec) | 0 | 0 | 0 | 0 | 0 | 0 |
| RSS | 5569 | 6 | 4718 | 2 | 4800 | 2 |
| <u>Alignment:</u> | | | | | | |
| Outer Gimbal (Pitch) | | | | | | |
| 1st angle (1.5°) | (15000) | (60) | (7700) | (30) | (0) | (0) |
| 2nd angle (2°) | (7500) | (104) | (2400) | (25) | (0) | (0) |
| Arithmetic Subtotal | 22500 | 164 | 10100 | 55 | 0 | 0 |
| Inner Gimbal (1, 75°) | 0 | 0 | 0 | 0 | 23420 | 165 |
| Spin Axis (2°) | 0 | 0 | 0 | 0 | 17500 | 92 |
| RSS | 22500 | 164 | 10100 | 55 | 29236 | 189 |
| <u>Operational:</u> | | | | | | |
| Pitch Rate (+5°/sec) | 3500 | 5 | 8000 | 13 | 0 | 0 |
| Angle Change (1 sec) | 800 | 5 | 275 | 2 | 0 | 0 |
| Cut-off timing (1 sec) | 250 | 4 | 5500 | 23 | 0 | 0 |
| RSS | 3600 | 8 | 9712 | 27 | 0 | 0 |
| <u>State Variables:</u> | | | | | | |
| Thrust (1%) | 5100 | 37 | 9700 | 75 | 0 | 0 |
| Mass (1%) | 5100 | 37 | 9700 | 75 | 0 | 0 |
| ISP (1%) | 730 | 8 | 2000 | 22 | 0 | 0 |
| RSS | 7250 | 53 | 13863 | 108 | 0 | 0 |
| RSS (Total) | 24657 | 175 | 20752 | 124 | 29627 | 189 |

*3 σ values resulting from utilizing the ascent stage only and the crudest abort guidance system presently envisioned.

TABLE III

| Ascent Cut-Off Conditions | Total Ascent, Transfer, and Rendezvous Velocity Requirements**** | | |
|--------------------------------|---|------|---------|
| | 4° | 6°* | 8° |
| Flight Path Angle (deg) | 4° | 6°* | 8° |
| Out of Plane Angle (deg) | 2° | 2° | 2° |
| <u>Total Velocity (ft/sec)</u> | | | |
| 5250 | 6385 | 6310 | 6330 |
| 5375* | 6340 | 6365 | 6455*** |
| 5500 | 6495 | 6565 | 6670** |

* Nominal ascent cut-off conditions for System #1

** "Worst Case" for System #1

*** "Worst Case" for System #2

**** In all cases application of the transfer ΔV took place twenty minutes after ascent cut-off.

TABLE IV
CHARACTERISTIC VELOCITY BUDGET (ft/sec)

| | System #1 (Time) | System #2 (Acceleration) |
|---------------------------|------------------|--------------------------|
| Ascent* | 5915 | 5790 |
| 1% Analysis Uncertainty** | 60 | 60 |
| Transfer & Rendezvous | 670 | 580 |
| Docking** | 25 | 25 |
| Total Required | 6670 | 6455 |
| Total Available | 7101 | 7101 |
| LEM = 6646 | | |
| CM = 455 | | |
| Excess Fuel | +431 ft/sec | +646 ft/sec |

* Includes a 10 second vertical rise initially and cut-off conditions biased to account for guidance uncertainties summarized in Table I.

** As per NASA budget

REFERENCES

- 1) White, R. L. , Use of the CSM Primary G&N System and Rendezvous Radar for LEM Aborts, Space Guidance Analysis Memo #7-64, MIT Instrumentation Laboratory, January 21, 1964.
- 2) Johnston, M.W. , and Dahlen, J.M. , Analysis of LEM Mission Inertial Uncertainties, E - 1473, MIT Instrumentation Laboratory, December, 1963, CONFIDENTIAL.
- 3) Cherry, G. W. , A Class of Unified Explicit Methods For Steering Throttleable and Fixed-Thrust Rockets, R - 417 Rev, MIT Instrumentation Laboratory, January, 1964.

E-1560

DISTRIBUTION LIST

Internal

| | |
|-----------------------|------------------------|
| R. Battin | M. Johnston (5) |
| W. Bean | A. Koso |
| P. Bryant | J. Lawrence (MIT/GAEC) |
| G. Cherry | J. McNeil |
| E. Copps | E. Schwarm |
| J. Dahlen | N. Sears |
| J. Dunbar | W. Shotwell (MIT/ACSP) |
| K. Dunipace (MIT/AMR) | M. Trageser |
| P. Felleman | R. White |
| S. Felix (MIT/S&ID) | R. Woodbury |
| D. Hoag | W. Wrigley |
| F. Houston | Apollo Library (2) |
| L. B. Johnson | MIT/IL Library (6) |

External

(ref. PPI-64)

| | |
|--|------|
| P. Ebersole (NASA/MSC) | (2) |
| W. Rhine (NASA/RASPO) | (1) |
| S. Gregorek (NAA S&ID/MIT) | (1) |
| T. Heuermann (GAEC/MIT) | (1) |
| AC Spark Plug | (10) |
| Kollsman | (10) |
| Raytheon | (10) |
| WESCO | (2) |
| Capt. W. Delaney (AFSC/MIT) | (1) |
| NAA RASPO: National Aeronautics and Space Administration Resident Apollo Spacecraft Program Office North American Aviation, Inc. Space and Information Systems Division 12214 Lakewood Boulevard Downey, California | (1) |
| FO: National Aeronautics and Space Administration, MSC Florida Operations, Box MS Cocoa Beach, Florida 32931 Attn: Mr. B. P. Brown | (3) |
| HDQ: NASA Headquarters 600 Independence Ave, SW Washington, D. C. 20546 MAP, E. T. Sullivan | (6) |
| AMES: National Aeronautics and Space Administration Ames Research Center Moffett Field, California Attn: Library | (2) |
| LEWIS: National Aeronautics and Space Administration Lewis Research Center Cleveland, Ohio Attn: Library | (2) |
| FRC: National Aeronautics and Space Administration Flight Research Center Edwards AFB, California Attn: Research Library | (1) |
| LRC: National Aeronautics and Space Administration Langley Research Center Langley AFB, Virginia Attn: Mr. A. T. Mattson | (2) |

GSFC: National Aeronautics and Space Administration (2)
Goddard Space Flight Center
Greenbelt, Maryland
Attn: Manned Flight Support Office Code 512

MSFC: National Aeronautics and Space Administration (2)
George C. Marshall Space Flight Center
Huntsville, Alabama
Attn: R-SA

GAEC: Grumman Aircraft Engineering Corporation (1)
Bethpage, Long Island, New York
Attn: Mr. A. Whitaker

NAA: North Americal Aviation, Inc. (1)
Space and Information Systems Division
12214 Lakewood Boulevard
Downey, California
Attn: Mr. R. Berry

GAEC RASPO: National Aeronautics and Space Administration (1)
Resident Apollo Spacecraft Program Officer
Grumman Aircraft Engineering Corporation
Bethpage, L. I. , New York

WSMR: National Aeronautics and Space Administration (2)
Post Office Drawer D
White Sands Missile Range
White Sands, New Mexico
Attn: AW 1

MSC: National Aeronautics and Space Administration (45)
Manned Spacecraft Center
Apollo Document Control Group
Houston 1, Texas 77058