

NOTICE - WHEN GOVERNMENT DRAWINGS, SPECIFICATIONS, OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT PROCUREMENT OPERATION, THE UNITED STATES GOVERNMENT THEREBY INCURS NO RESPONSIBILITY FOR ANY OMISSION OR WHATSOEVER, AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING THE ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE, OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERETO.


1010406

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL
-			

REQUIREMENTS:

1. GENERAL:
  - A. INTERPRET DRAWING IN ACCORDANCE WITH STANDARDS PRESCRIBED BY MIL-D-70327.
  - B. UNITS SHALL BE CAPABLE OF MEETING THE REQUIREMENTS OF MIL-C-15305, GRADE 1, CLASS B, EXCEPT AS AND IN ADDITION TO THE REQUIREMENTS SPECIFIED HEREIN.
  - C. THE SUPPLIER SHALL CONFORM TO THE QUALITY ASSURANCE PROVISIONS AS CONTAINED IN ND 1015404, CLASS 2.
  - D. UNITS SHALL MEET THE QUALIFICATION REQUIREMENTS OF ND 1002047.
  - E. MARKING: UNITS SHALL BE MARKED (COLOR CODED) PER MIL-C-15305.
  - F. PACKAGING AND PACKING: LEVEL C PER MIL-C-15305 (BEST COMMERCIAL PRACTICE). MARKING: UNIT PACKAGES, INTERMEDIATE PACKAGES, AND EXTERIOR SHIPPING CONTAINERS SHALL BE MARKED WITH THE MANUFACTURER'S NAME AND/OR SYMBOL, PART NUMBER AND THE NASA DRAWING NUMBER, DASH NUMBER AND REVISION LETTER.
2. ACCEPTANCE AND INSPECTION:
  - A. LEAD DATA: SHALL BE GOLD PLATED DUMET PER ND 1015401. A CERTIFICATE OF COMPLIANCE WITH THIS REQUIREMENT SHALL ACCOMPANY EACH SHIPMENT.
  - B. ELECTRICAL CHARACTERISTICS: PER TABLE I.
    - INDUCTANCE,  $L_{eff}$  (+25°C)
    - RESISTANCE,  $R_{DC}$
  - C. DIELECTRIC VOLTAGE (SEA LEVEL): 1400 VOLTS RMS.
    - 70,000 FEET: 500 VOLTS RMS.
  - D. MARKING: PER PARAGRAPH 1 E.
3. DESIGN:
  - A. AMBIENT TEMPERATURE: +90°C MAXIMUM.
  - B. WORKING VOLTAGE: 500 VOLTS MAXIMUM.
  - C. INDUCTANCE, EFFECTIVE (-55°C TO +125°C): PER TABLE I, EXCEPT TOTAL TOLERANCE SHALL BE ± 15 PERCENT.
  - D. ALTITUDE: 70,000 FEET.
  - E. LEAD PULL: FIVE (5) POUNDS, MINIMUM.
4. SPECIAL CONDITIONING (BY SUPPLIER):
  - A. ALL COILS SHALL BE BURNED IN FOR 50 HOURS AT  $I_{DC}$  = RATED (SEE TABLE I) AT AN AMBIENT TEMPERATURE OF +90°C. INDUCTANCE CHANGE AT CONCLUSION OF BURN-IN SHALL NOT EXCEED INITIAL PURCHASE TOLERANCE.


**FOR INFORMATION ONLY**  
 CLASS B RELEASE TDR No. 00803 DATE 10 Sep 63

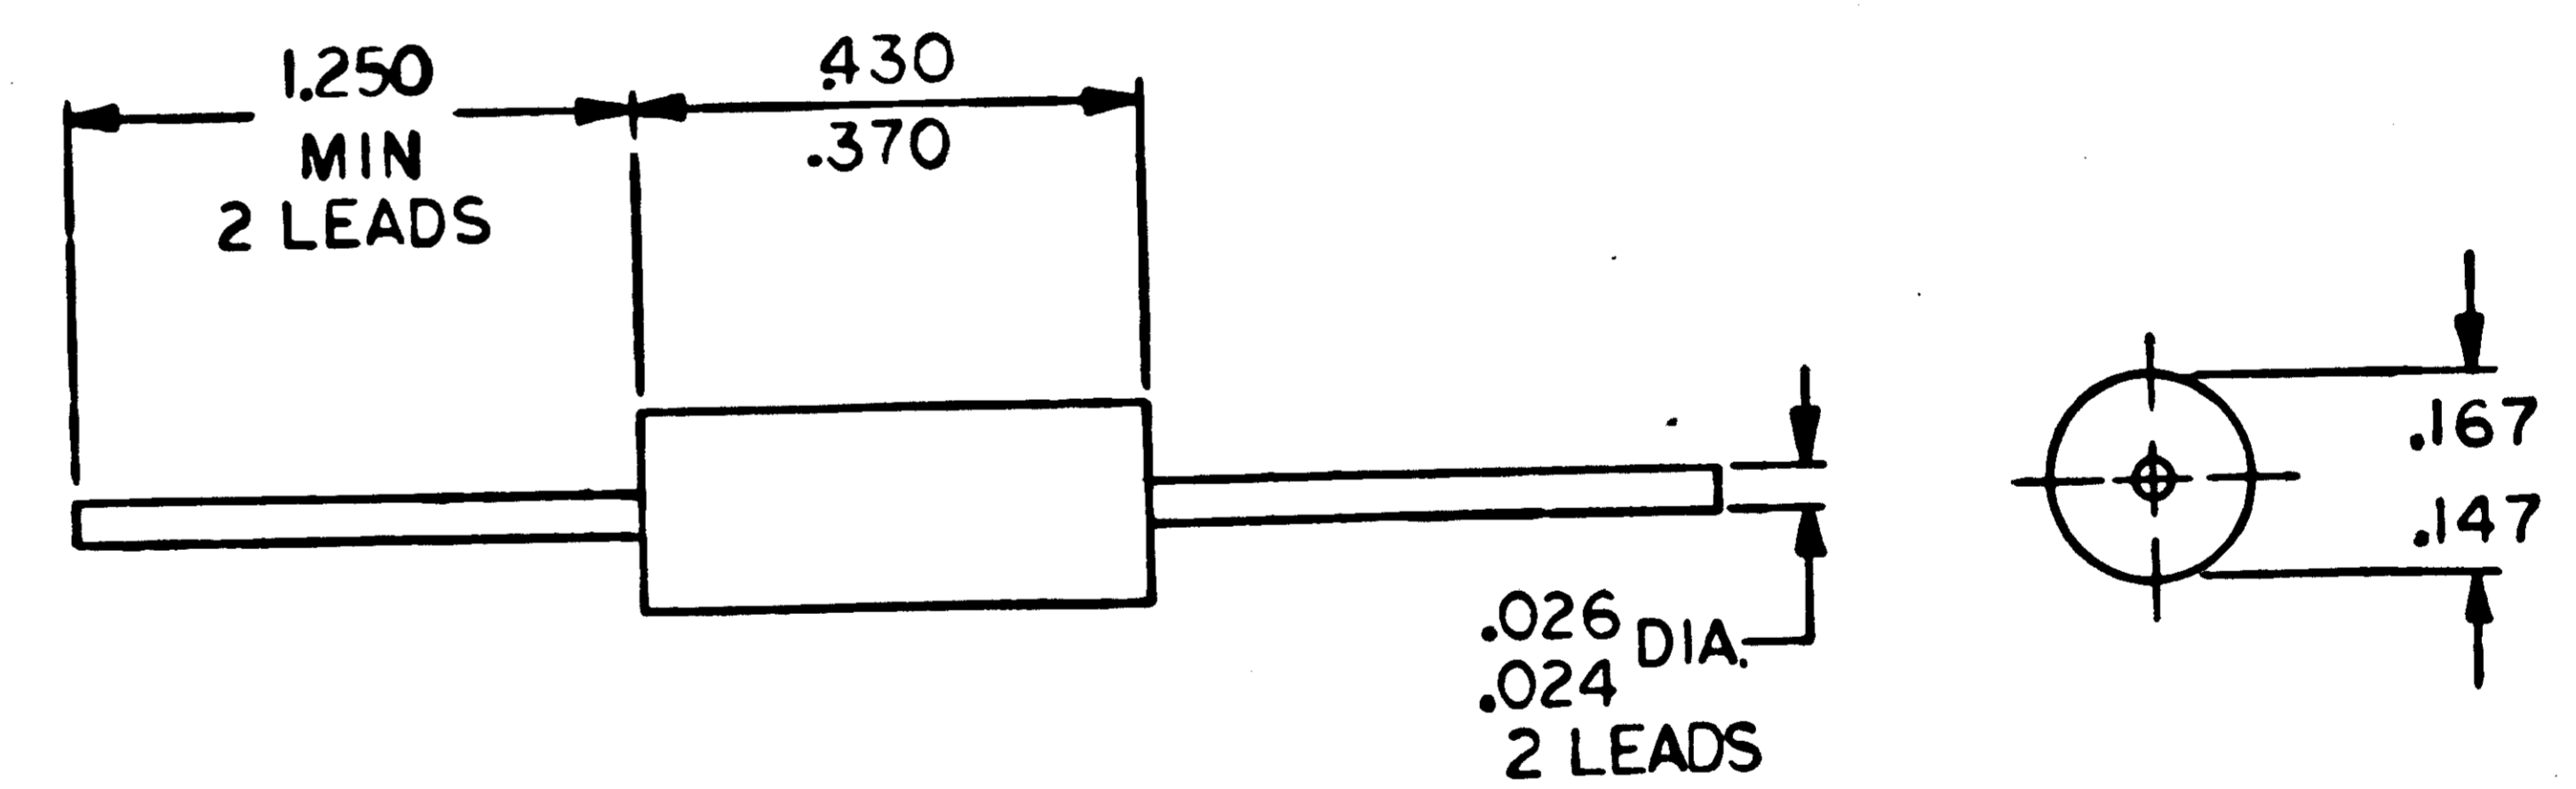

PROCURE ONLY FROM APPROVED SOURCES LISTED IN ND 1002034 FOR THIS DRAWING.

SHEET 1	SHEET 2
REVISION STATUS OF SHEETS	

QTY REQD	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	FIND NO.
LIST OF MATERIALS			
MIT INSTRUMENTATION LAB CAMBRIDGE, MASS		MANNED SPACECRAFT CENTER HOUSTON, TEXAS	
DRAWN <i>R. Kane</i> DATE <i>15 Mar 63</i>		COIL, RF, CHOKE	
CHECKED <i>A. [unclear]</i> DATE <i>20 Mar 63</i>			
APPROVAL <i>[Signature]</i> DATE <i>3/19/63</i>		SPECIFICATION CONTROL DRAWING	
MATERIAL			
HEAT TREATMENT		CODE IDENT NO.	NASA DRAWING NO.
NONE		C	1010406
NEXT ASSY	USED ON	SCALE NONE	WT
APPLICATION		SHEET 1 OF 2	

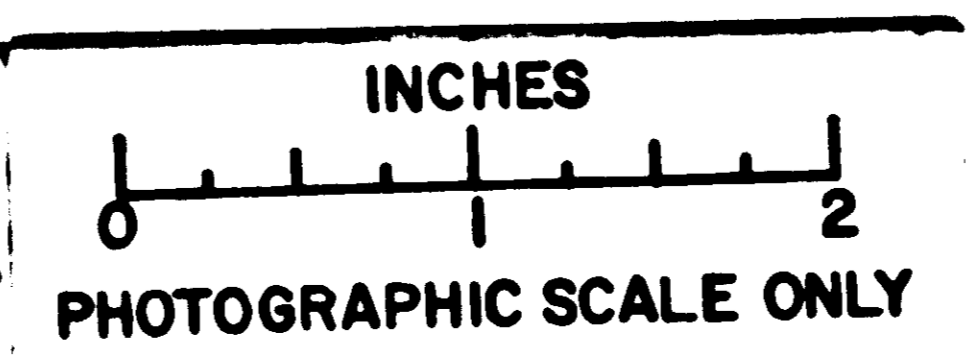

NOTICE - WHEN GOVERNMENT DRAWINGS, SPECIFICATIONS, OR OTHER DATA ARE USED FOR ANY PURPOSE OTHER THAN IN CONNECTION WITH A DEFINITELY RELATED GOVERNMENT OPERATION, THE UNITED STATES GOVERNMENT THEREBY INCURS NO RESPONSIBILITY NOR ANY OBLIGATION WHATSOEVER, AND THE FACT THAT THE GOVERNMENT MAY HAVE FORMULATED, FURNISHED, OR IN ANY WAY SUPPLIED THE SAID DRAWINGS, SPECIFICATIONS OR OTHER DATA IS NOT TO BE REGARDED BY IMPLICATION OR OTHERWISE AS IN ANY MANNER LICENSING THE HOLDER OR ANY OTHER PERSON OR CORPORATION, OR CONVEYING ANY RIGHTS OR PERMISSION TO MANUFACTURE, USE, OR SELL ANY PATENTED INVENTION THAT MAY IN ANY WAY BE RELATED THERE TO.

1010406

REVISIONS			
SYM	DESCRIPTION	DATE	APPROVAL

TABLE I

ELECTRICAL CHARACTERISTICS AT +25°C, UNLESS OTHERWISE SPECIFIED

DASH NUMBER	Leff ± 10%	Qeff MIN	f	f <sub>0</sub> MIN	C <sub>d</sub> ± 10%	R <sub>p</sub> MIN	R <sub>p</sub> MIN	R <sub>DC</sub> MAX	I <sub>DC</sub> ** MAX	I <sub>DC</sub> * (INCR.)		
	uH	—	mc	mc	pf	k Ω	mc	k Ω	mc	Ω	mA	mA
-1	100,000	14.4	.079	0.11	12.2	918	0.060	1140	0.14	678.0	22	3.0
-2	68,000	18.4	.079	0.13	13.2	675	0.079	1020	0.16	580.0	24	4.0
-3	47,000	18.4	.079	0.16	13.5	623	0.10	980	0.20	473.0	26	5.5
-4	33,000	21.6	.079	0.19	13.3	780	0.15	850	0.24	343.0	30	7.5
-5	22,000	21.6	.079	0.25	11.6	536	0.15	710	0.31	274.0	33	9
-6	100	41.6	2.5	10.00	1.7	62	5	44	12.5	3.12	325	120
-7	8.2	40.0	7.9	50.00	.78	45	20	48	57.0	1.32	475	475
-8	1.0	37.6	25.0	140.00	.84	13	75	12	164.0	.070	1900	1900
-9	1.5	36.0	7.9	115.00	.83	17	50	17	135.0	.12	1300	1300
-10	2.2	36.0	7.9	100.00	.73	21	40	25	112.0	.19	1100	1100
-11	3.9	35.2	7.9	75.00	.73	33	30	32	84.0	.40	750	750
-12	22.0	36.8	2.5	41.00	.48	9	15	10	52.0	.96	600	220
-13	33.0	36.0	2.5	34.00	.48	14	12	13	40.0	1.37	490	190
-14	47.0	41.6	2.5	27.00	.48	19	12	16	34.0	2.11	400	175

FOR INFORMATION ONLY


CLASS B RELEASE TDR No. 00803 DATE

10 Apr 63

\* CURRENT TO CAUSE FIVE PERCENT REDUCTION IN INDUCTANCE.  
 \*\* DERATE LINEARLY FROM +90°C TO +150°C.

MASTER

QTY REQD	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	FIND NO.
LIST OF MATERIALS			
MIT INSTRUMENTATION LAB CAMBRIDGE, MASS.		MANNED SPACECRAFT CENTER HOUSTON, TEXAS	
DRAWN <u>R. Kane</u> DATE <u>5/14/63</u>		<b>COIL, RF, CHOKE</b> SPECIFICATION CONTROL DRAWING	
CHECKED <u>A. Wilson</u> DATE <u>20 MAR 63</u>			
APPROVAL <u>[Signature]</u> DATE <u>4/9/63</u>		NASA DRAWING NO. <b>1010406</b>	
HEAT TREATMENT		CODE IDENT NO. <b>C</b>	NASA DRAWING NO. <b>1010406</b>
FINAL FINISH		SCALE <b>NONE</b>	WT
APPLICATION		SHEET <b>2</b> OF <b>2</b>	

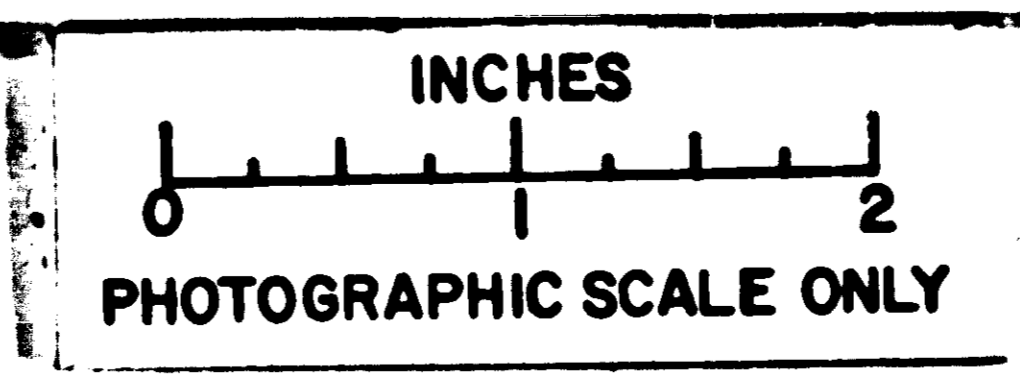

1010406